




## Connect tight spaces with more order.

CAT 6 and 6A patch cables with angled connectors.

Sometimes a corner is the direct way to more order and comfort. CAT 6 and 6A patch cables with 90° angle connectors are designed for limited space. No matter if it's a packed network cabinet, a narrow niche or mounting directly on the wall: The cable can be easily plugged into even hard to reach places. It runs space-savings downwards\* and reliably transfers data or energy from device to device via Power over Ethernet.

\*Each depending on the arrangement of the RJ45 jack

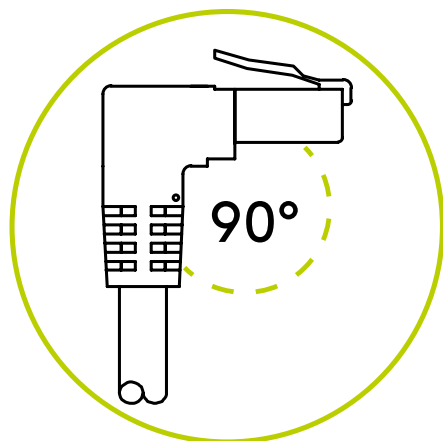

space-saving



previously

afterwards



max. bandwidth	250 MHz
Specification	CAT 6
Cable type	round cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	25/7 (stranded)
Shielding class	U/UTP
Material cable sheath	PVC
Cable sheath diameter (approx.)	5.9 mm
Kink protection	both sides
Connection, type	RJ45 male 90° (8P8C)
Connection, shielding	no
Connection 2, type	RJ45 male (8P8C)
Connection, contact material	gold-plated
Latch protection	unilaterally
Contacting	EIA/TIA-568B


## Goobay

### CAT 6 patchcable 1x 90°angled, U/UTP

latch on top, CCA copper mixture

- unshielded LAN/network cable to connect network components with 2 x RJ45 connectors
- RJ45 plug straight to RJ45 plug angled, ideal solution for minimal space
- with gold plated PINs
- slimline strain relief
- Latch protection and length indication on straight plug
- suitable for Power over Ethernet (PoE/PoE+)

Cable length	black	white	RRP
	Bulk	Bulk	
0.25 m	51513	51520	<b>4.49 €</b>
0.50 m	51514	51521	<b>4.99 €</b>
1.00 m	51515	51522	<b>5.49 €</b>
2.00 m	51516	51523	<b>5.99 €</b>
3.00 m	51517	51524	<b>6.99 €</b>
5.00 m	51518	51525	<b>7.99 €</b>
10.00 m	51519	51526	<b>12.49 €</b>

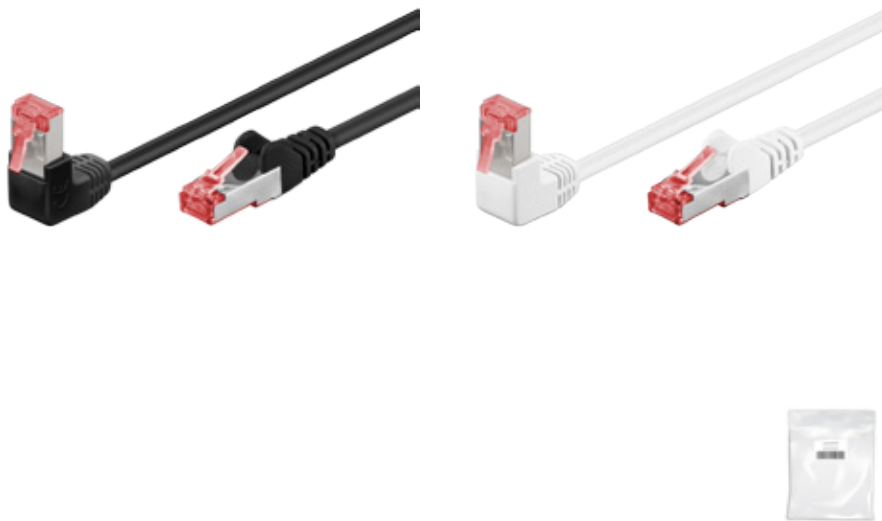

max. bandwidth	250 MHz
Specification	CAT 6
Cable type	round cable
Inner conductor material	CU (copper)
AWG	28/7 (stranded)
Shielding class	S/FTP (PiMF)
Number of shieldings	2 x
Type 1, shielding	foil (alu) PiMF
Type 2, shielding	braid (alu) overall shield
Material cable sheath	LSZH
Cable sheath diameter (approx.)	6 mm
LSZH compliant	yes
Kink protection	both sides
Connection, type	RJ45 male 90° (8P8C)
Connection, shielding	yes
Connection 2, type	RJ45 male (8P8C)
Connection, contact material	gold-plated 1µ
Latch protection	unilaterally
Contacting	EIA/TIA-568B


## Goobay

### CAT 6 patchcable 1x 90°angled, S/FTP (PiMF)

latch on top, LSZH halogen-free, copper

- double shielded LAN/network cable to connect network components with 2 x RJ45 connectors
- pairs screening: PiMF (pairs in metal foil) + outer shield: braiding
- RJ45 plug straight to RJ45 plug angled, ideal solution for minimal space
- with gold plated PINs
- slimline strain relief
- Latch protection and length specification on straight plug
- suitable for Power over Ethernet (PoE/PoE+)

Cable length	black	white	RRP
	Bulk	Bulk	
0.25 m	51541	51548	<b>7.49 €</b>
0.50 m	51542	51549	<b>7.99 €</b>
1.00 m	51543	51550	<b>8.99 €</b>
2.00 m	51544	51551	<b>10.99 €</b>
3.00 m	51545	51552	<b>13.49 €</b>
5.00 m	51546	51553	<b>14.99 €</b>
10.00 m	51547	51554	<b>19.99 €</b>

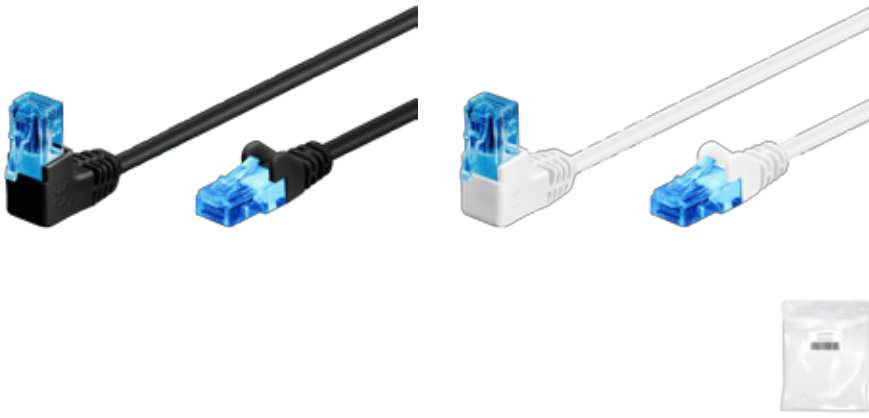

max. bandwidth	500 MHz
Specification	CAT 6A
Cable type	round cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	24/7 (stranded)
Shielding class	U/UTP
Material cable sheath	PVC
Cable sheath diameter (approx.)	5.9 mm
LSZH compliant	yes
Kink protection	both sides
Connection, type	RJ45 male 90° (8P8C)
Connection 2, type	RJ45 male (8P8C)
Connection, contact material	gold-plated
Latch protection	unilaterally
Contacting	EIA/TIA-568B


Goobay

## CAT 6A patchcable 1x 90°angled, U/UTP

latch on top, CCA copper mixture

- unshielded LAN/network cable to connect network components with 2 x RJ45 connectors
- RJ45 plug straight to RJ45 plug angled, ideal solution for minimal space
- with gold plated PINs
- slimline strain relief
- Latch protection and length indication on straight plug
- suitable for Power over Ethernet (PoE/PoE+)

Cable length	black	white	RRP
	Bulk	Bulk	
0.25 m	51527	51534	<b>5.49 €</b>
0.50 m	51528	51535	<b>5.99 €</b>
1.00 m	51529	51536	<b>6.49 €</b>
2.00 m	51530	51537	<b>6.99 €</b>
3.00 m	51531	51538	<b>7.99 €</b>
5.00 m	51532	51539	<b>8.99 €</b>
10.00 m	51533	51540	<b>15.99 €</b>

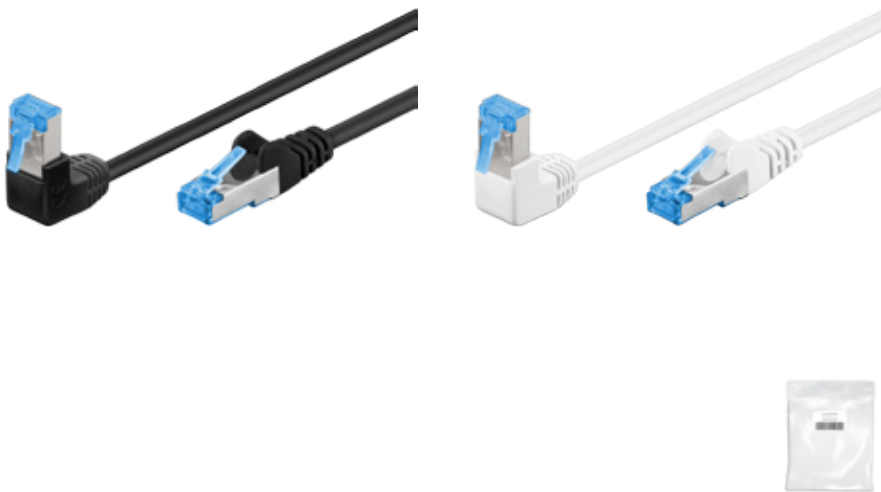

max. bandwidth	500 MHz
Specification	CAT 6A
Cable type	round cable
Inner conductor material	CU (copper)
AWG	27/7 (stranded)
Shielding class	S/FTP (PiMF)
Number of shieldings	2 x
Type 1, shielding	foil (alu) PiMF
Type 2, shielding	braid (alu) overall shield
Material cable sheath	LSZH
Cable sheath diameter (approx.)	6 mm
Kink protection	both sides
Connection, type	RJ45 male 90° (8P8C)
Connection, shielding	yes
Connection 2, type	RJ45 male (8P8C)
Connection, contact material	gold-plated 3µ
Latch protection	unilaterally
Contacting	EIA/TIA-568B

Goobay

## CAT 6A patchcable 1x 90°angled, S/FTP (PiMF)

latch on top, LSZH halogen-free, copper

- double shielded LAN/network cable to connect network components with 2 x RJ45 connectors
- wire pair shielding: PiMF (pairs in metal foil) + overall shielding: braiding
- RJ45 plug straight to RJ45 plug angled, ideal solution for minimal space
- with gold-plated contact surfaces (PINs)
- Slimline cable bend relief
- Latch protection and length indication on straight connector
- suitable for Power over Ethernet (PoE/PoE+)

Cable length	black	white	RRP
	Bulk	Bulk	
0.25 m	51555	51562	<b>8.49 €</b>
0.50 m	51556	51563	<b>9.49 €</b>
1.00 m	51557	51564	<b>10.49 €</b>
2.00 m	51558	51565	<b>12.49 €</b>
3.00 m	51559	51566	<b>14.99 €</b>
5.00 m	51560	51567	<b>17.49 €</b>
10.00 m	51561	51568	<b>22.99 €</b>