



Compatible with every
Quattro & Quad LNB



For connecting up
to 2 satellites/LNBs




**22
kHz** integrated
generator

Individual TV and radio reception

For up to 16 subscribers

The satellite multiswitches from Goobay are the convenient solution for connecting multiple devices for TV and radio reception in the same house to just one satellite dish. Whether 1 or 2 satellites: The switches ensure that up to 16 subscribers can enjoy their individual programme - for maximum flexibility in television reception. Thanks to the integrated 22 kHz generator, the switches are compatible with every Quattro LNB and Quad LNB. The terrestrial input is also suitable for connecting broadcast or DVB-T/T2 systems.

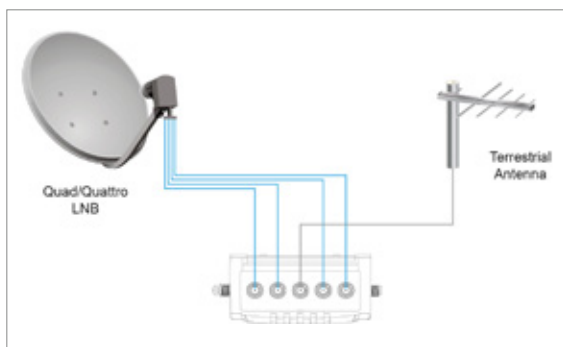

Goobay

Sat Multiswitch 5 Inputs/ 8|12|16 Outputs

distributor for a max. of 8|12|16 subscribers from one satellite

- For connecting a single LNB, e.g. to the Astra, Hotbird, Eutelsat or Türksat satellite
- With an integrated 22 kHz generator and suitable for both Quattro LNBs and Quad LNBs
- Provides an individual reception signal to all connected subscribers - simultaneously and without interference
- Supports HDTV, 3D, HD, 4K, 8K UHD and Sky and has 1x terrestrial input for DAB, DAB+, FM, FM, DVB-T and DVB-T2 antennas
- With modern electronics and a short-circuit-proof 230 V power supply unit (Euro-plug) for low power consumption, even in standby mode
- Excellent transmission characteristics due to frequency-dependent amplification, very low signal loss and a high-quality metal housing to protect against interference


8 Outputs	64874	Retail Box	RRP	49.99 €
12 Outputs	64875	Retail Box	RRP	59.99 €
16 Outputs	64876	Retail Box	RRP	69.99 €



	8 Outputs	12 Outputs	16 Outputs
Item	64874	64875	64876
Dimensions (W x H x D)	255.2 x 55.1 x 133 mm	295.2 x 55.1 x 133 mm	335.2 x 55.1 x 133 mm

Technical specifications

Signal transmission		Device connections	
Transmission modes	DVB-S, DVB-S2, DVB-T, DVB-T2	Max. subscribers	8 12 16
Frequency range	950 - 2.150 MHz	Switching commands	13/0; 18/0; 13/22; 18/22 V/kHz
Frequency range terrestrial	47 - 862 MHz	Input, type	F connector female
Polarisation decoupling sat.	28 - 30 dB	Input voltage	230 V (AC)
Output level sat.	100 dBμV	Number of inputs	5 In
Return loss sat. inputs	10 dB	Output, type	F connector female
Return loss sat. outputs	8 dB	Number of outputs	8 12 16 Out
Output level terr.	88 dBμV		
Return loss terrestrial inputs	8 dB		
Return loss terrestrial outputs	8 dB		
Impedance	75 Ω		

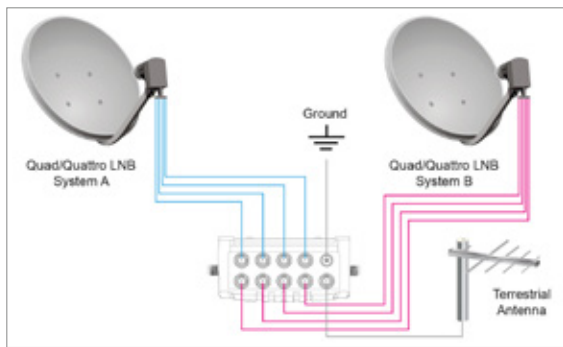

Goobay

Sat Multiswitch 9 Inputs/ 4|8|12|16 Outputs

distributor for a max. of 4|8|12|16 subscribers from two satellites

- For connecting up to 2x LNBs simultaneously, e.g. to the satellites Astra and Hotbird or Eutelsat and Türksat
- With an integrated 22 kHz generator and suitable for both Quattro LNBs and Quad LNBs
- Via DiSEqC 2.0, two satellite positions can be selected and distributed to up to 4 subscribers, e.g. to satellite receivers or TV sets with a satellite tuner
- Provides an individual reception signal to all connected subscribers - simultaneously and without interference
- Supports HDTV, 3D, HD, 4K, 8K UHD and Sky and has 1x terrestrial input for DAB, DAB+, FM, FM, DVB-T and DVB-T2 antennas
- With modern electronics and a short-circuit-proof 230 V power supply unit (Euro-plug) for low power consumption, even in standby mode
- Excellent transmission characteristics due to frequency-dependent amplification, very low signal loss and a high-quality metal housing to protect against interference

4 outputs	64879	Retail Box	RRP	59.99 €
8 outputs	64880	Retail Box	RRP	79.99 €
12 outputs	64881	Retail Box	RRP	99.99 €
16 outputs	64884	Retail Box	RRP	114.99 €



	4 Outputs	8 Outputs	12 Outputs	16 Outputs
Item	64879	64880	64881	64884
Dimensions (W x H x D)	233.5 x 55.1 x 118.5 mm	233.5 x 55.1 x 128.4 mm	273.5 x 55.1 x 128.4 mm	313.5 x 55.1 x 128.4 mm

Technical specifications

Signal transmission		Device connections	
Transmission modes	DVB-S, DVB-S2, DVB-T, DVB-T2	Max. subscribers	4 8 12 16
Frequency range	950 - 2,150 MHz	DiSEqC	v2.0
Frequency range terrestrial	47 - 862 MHz	Switching commands	13/0; 18/0; 13/22; 18/22 V/kHz
Polarisation decoupling sat.	28 - 30 dB	Input, type	F connector female
Output level sat.	100 dBμV	Input voltage	230 V (AC)
Return loss sat. inputs	10 dB	Number of inputs	9 In
Return loss sat. outputs	8 dB	Output, type	F connector female
Output level terr.	88 dBμV	Number of outputs	4 8 12 16 Out
Return loss terrestrial inputs	8 dB		
Return loss terrestrial outputs	8 dB		
Impedance	75 Ω		



Shielding efficiency	120 dB
Cable type	coaxial cable
Inner conductor material	CCS
Number of shieldings	4 x
Type 1, shielding	foil (aluminium)
Type 2, shielding	braid (aluminium) 48x
Type 3, shielding	foil (aluminium)
Type 4, shielding	braid (aluminium) 48x
Cable sheath diameter (approx.)	7 mm
Dielectric diameter	4.57 mm
Inner conductor, core diameter	0.9 mm
Meter scaling	yes
Fire class (CPR)	Eca

Goobay

120 dB SAT Coaxial Cable, 4x Shielded, CCS

for digital SAT and DVB-C systems

- Satellite cable for connecting or extending e. g. cable TV or radio systems
- High-quality and flexible PVC sheathing guarantees protection against heat, cold and weather
- TV aerial cable is digitally compatible for the installation of HDTV via DVB-S/S2, DVB-T/T2, DVB-C/C2
- Antenna cable is triple shielded for effective protection over long distances
- Inner conductor made of particularly conductive and flexible copper
- Metre scaling is indicated on the coax cable
- Meets the CPR (Construction Products Regulation), therefore corresponding to the Eca fire protection class.

100.00 m	74021	Cable Reel	RRP	34.99 €
305.00 m	74020	Cable Reel	RRP	99.99 €
500.00 m	74022	Cable Reel	RRP	149.99 €

74021

74020

74022



Goobay

Universal Octo LNB

digital SAT LNB (DVB-S2) for 8 participants (8K, 4K, UHD, HDTV, 3D)

- Reception system for connecting satellite systems to 8 independent receivers/TVs
- Suitable for direct connection without multiswitch
- Equipped with fully encapsulated, weatherproof housing
- Additional protection of the gold-plated F-connectors through pull-out wetness protection
- Higher signal strength thanks to 0.1 dB noise figure



67273 Retail Box

RRP **39.99 €**



Goobay

Universal Quad LNB

digital SAT LNB (DVB-S2) for 4 participants (8K, 4K, UHD, HDTV, 3D)

- Reception system for connecting satellite systems to 4 independent receivers/TVs
- Suitable for direct connection without multiswitch
- Equipped with fully encapsulated, weatherproof housing
- Additional protection of the gold-plated F-connectors through pull-out wetness protection
- Higher signal strength thanks to 0.1 dB noise figure



67272 Retail Box

RRP **24.99 €**





Goobay

Universal Quattro LNB

digital SAT LNB (DVB-S2) only for use with multiswitches (8K, 4K, UHD, HDTV, 3D)

- Reception system for setting up multisubscriber SAT systems
- Exclusively works in conjunction with a multiswitch
- Equipped with fully encapsulated, weatherproof housing
- Additional protection of the gold-plated F-connectors through pull-out wetness protection
- Higher signal strength thanks to 0.1 dB noise figure



67271 Retail Box

RRP 17.99 €



Goobay

Universal Twin LNB

digital SAT LNB (DVB-S2) for 2 participants (8K, 4K, UHD, HDTV, 3D)

- Reception system for connecting satellite systems to 2 independent receivers/TVs
- Suitable for direct connection without a multiswitch
- Equipped with fully encapsulated, weatherproof housing
- Additional protection of the gold-plated F-connectors through pull-out wetness protection
- Higher signal strength thanks to 0.1 dB noise figure



67270 Retail Box

RRP 14.99 €



Goobay

Universal Single LNB

digital SAT LNB (DVB-S2) for 1 participants (8K, 4K, UHD, HDTV, 3D)

- Reception system for connecting satellite systems to an independent receiver/TV set
- Suitable for direct connection without a multiswitch
- Equipped with fully encapsulated, weatherproof housing
- Additional protection of the gold-plated F-connectors through pull-out wetness protection
- Higher signal strength thanks to 0.1 dB noise figure



67269 Retail Box

RRP 5.99 €







Goobay

LNB Weather Protection Cover for Satellite Systems

perfect rain protection / snow protection / weather protection

- Reduces reception interference in bad weather conditions, for an optimal and stable TV picture.
- Protection of your SAT LNB against environmental influences such as rain, snow, hail, ice or even bird droppings.
- Simple and quick clamp mounting on the feed arm, possible without additional tools
- No adjustment required, no disassembly of the existing LNB necessary.
- Cover consisting of flexible, weatherproof and transparent plastic (UV-resistant)
- Can be used for rectangular and two-arm LNB feed arms, also for 2 LNBs (multifeed)
- max. width of the LNB cover of 24.5 cm



67190 Retail Box

RRP 17.99 €



Goobay

80 cm Aluminium Satellite Dish

for single/multiple participants with particularly stable feed arm that defies every storm

- Satellite array with aluminium reflector for efficient corrosion protection
- Extra-wide feed arm (50 mm x 20 mm) with snap-in folding mechanism
- Double claw clamps for particularly high torsional strength
- Solid die-cast wing nuts for easy fixation
- Self-locking nuts for fastening the reflector
- Form-forged reflector bracket (back section) made of galvanised steel for increased mechanical strength



anthracite 67333 Retail Box

RRP 59.99 €

light gray 67334 Retail Box

RRP 59.99 €

