

01

PRODUCT NEWS

- + Wireless Powerbank for Apple Watch 2,500 mAh
- + Ultra-Flexible CAT 6A Patch Cables U/UTP (LSZH-TPE)
- + Ultra-Flexible CAT 6A Patch Cables S/FTP (LSZH-TPE)
- + Digital Soldering Station 70 W
- + Soldering Set Starter, 12 Pcs.
- + Solder Lead-Free, ø 0.8 mm
- + Soldering Tools, 6 Pcs.
- + Magnetic Circuit Board Holders and Metal Plate
- + Magnetic Circuit Board Holders

wentronic

PRODUCT NEWS

OVERVIEW


**Wireless Powerbank
for Apple Watch
2,500 mAh**



**Ultra-Flexible
CAT 6A Patch Cables
U/UTP (LSZH-TPE)**



**Ultra-Flexible
CAT 6A Patch Cables
S/FTP (LSZH-TPE)**

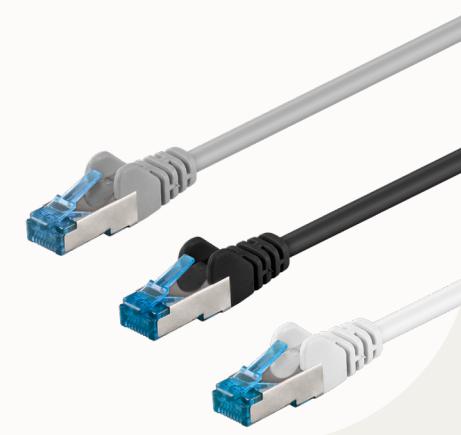

**Digital
Soldering Station
70 W**



**Soldering Set
Starter,
12 Pcs.**



**Solder Lead-Free,
Ø 0.8 mm**



**Soldering Tools,
6 Pcs.**



**Magnetic Circuit
Board Holders and
Metal Plate**



**Magnetic Circuit
Board Holders**



Wireless Power Bank for Apple Watch 2,500 mAh

5 W, compact travel essential with wireless charging technology



Easy wireless and inductive charging: MagSafe-enabled and therefore compatible with all Apple Watch models and Apple AirPods

Independent on the go: The mini power bank charges wherever there are no cables or mains sockets available, e.g. on the way to work, on the train or on hikes in the countryside

Ideal output for the Apple Watch: 2,500 mAh for up to 8x charging (depending on model) – wireless with up to 2.5 W and extra fast via cable with up to 5 W

The easy-to-read digital LED display shows the charge status of the external battery in per cent

Safe on/off switch and automatic switch-off after 10 seconds

Handy carabiner hook: Hooks securely into your bag, backpack or key ring for safe storage during transport

The power bank is recharged via the combined USB-C™ input/output (USB-C™ to USB-A charging cable included, 0.3 m)



goobay®



Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 05	76253	4040849762536	19.99 €	40	1	15.50 cm	7.50 cm	2.40 cm	0.118 kg

Ultra-Flexible CAT 6A Patch Cable U/UTP

copper conductor (CU), halogen-free TPE cable sheath (LSZH)



The new flexibility:

CAT cable with ultra-flexible TPE sheath for easy handling and especially effective LSZH protection

Simply connected:

Unshielded LAN cable with 2x RJ45 plugs for connecting network components at home, in the office, in the server cabinet, etc.

Fast, faster, CAT 6A:

As a CAT 6A network cable, suitable for 10 Gigabit Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T, 10/100/1000/10000 Mbit/s

Top quality:

High-quality copper conductor (CU) and 3 μ gold-plated contact surfaces for a high-performance connection, as well as length indication on the overmoulded slimline bend protection sleeve


Securely locked in place:

The latch protection on the RJ45 connector prevents the latch from snagging or breaking off

Always a favourite with LSZH:


Compliant with applicable standards IEC 61034 (low smoke) and IEC 60754-2 (halogen-free)

The internet cable is suitable for Power over Ethernet (PoE, PoE+)

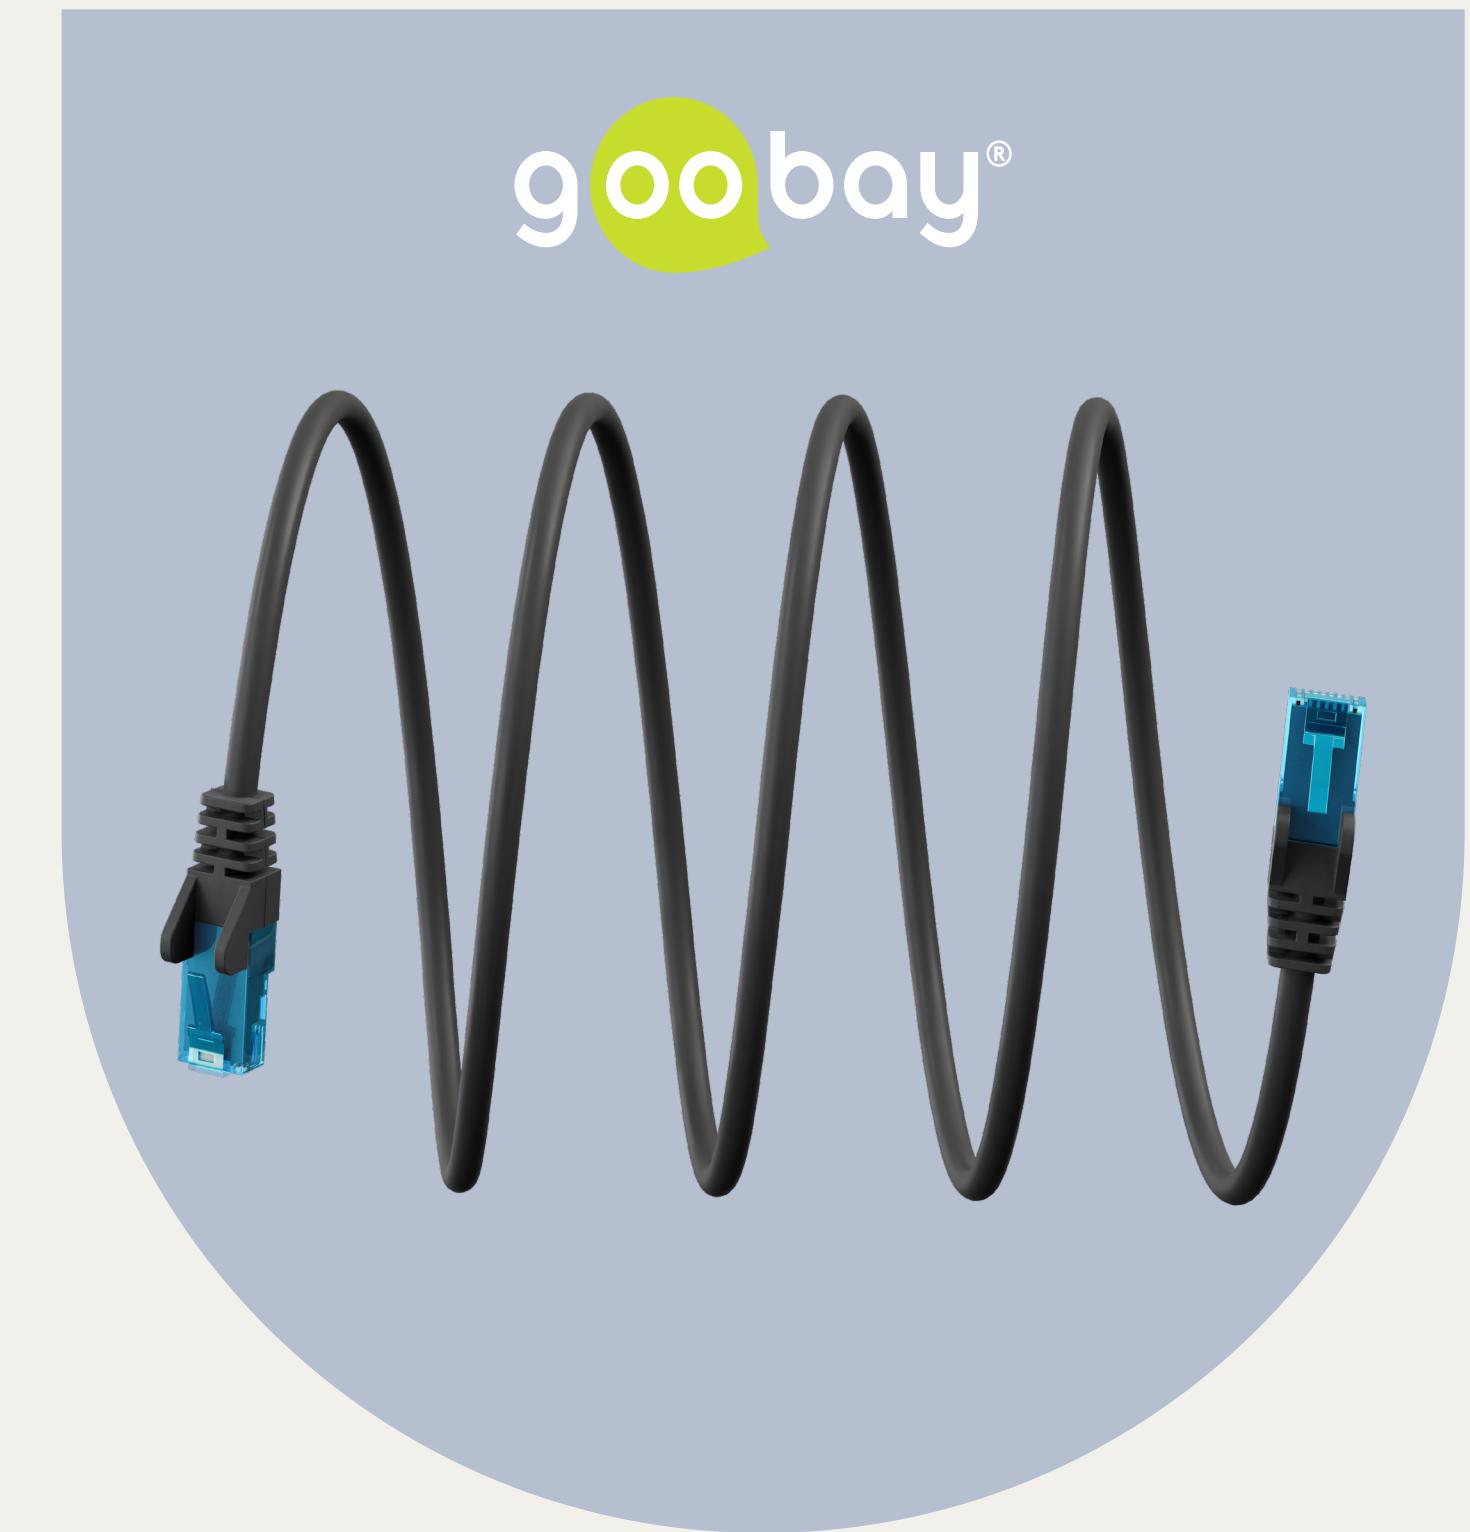


Ultra-Flexible CAT 6A Patch Cable U/UTP


copper conductor (CU), halogen-free TPE cable sheath (LSZH)

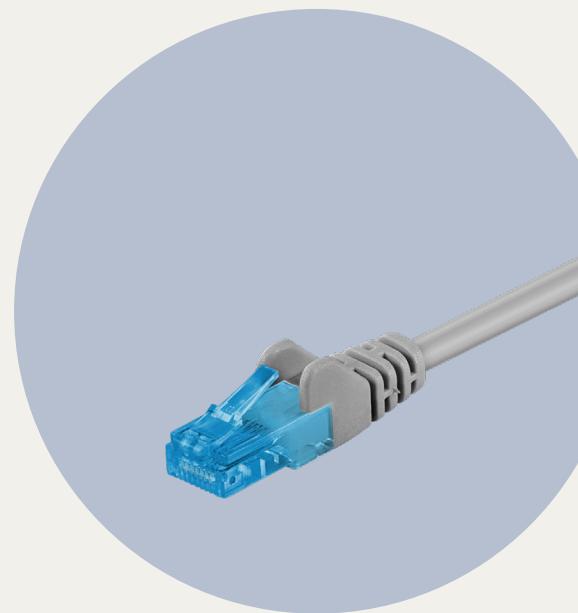

Grey

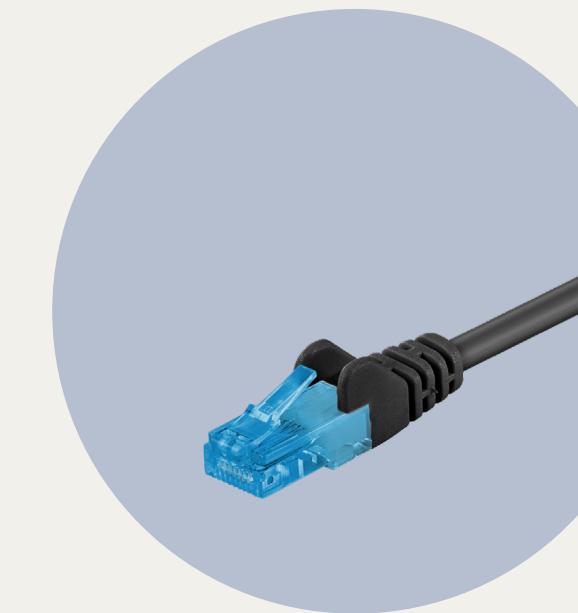

Black

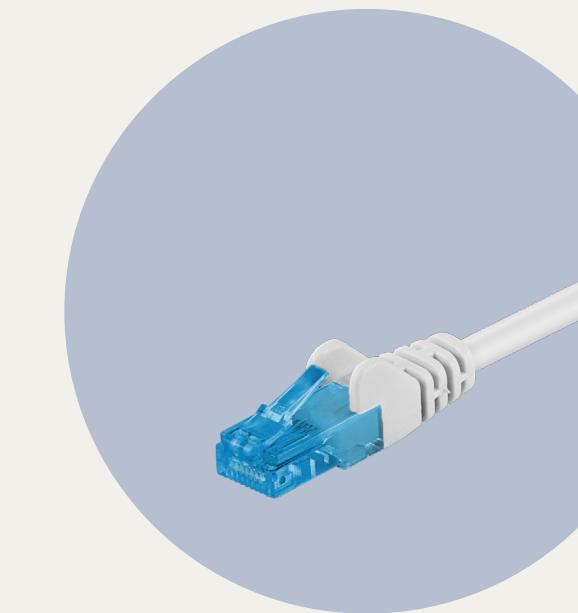

White



Availability	Cable length	RRP	Packaging: Cable Tag											
			Item no.	EAN	Item no.	EAN	Item no.	EAN	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	0.25 m	4.79 €	79173	4040849791734	79174	4040849791741	79175	4040849791758	600	1	27.00 cm	1.50 cm	1.30 cm	0.014 kg
● exp. from week 07	0.50 m	5.29 €	79176	4040849791765	79177	4040849791772	79178	4040849791789	400	1	11.00 cm	11.00 cm	1.50 cm	0.022 kg
● exp. from week 07	1.00 m	5.79 €	79179	4040849791796	79185	4040849791857	79186	4040849791864	300	1	13.00 cm	12.00 cm	1.50 cm	0.028 kg
● exp. from week 07	2.00 m	6.79 €	79187	4040849791871	79188	4040849791888	79189	4040849791895	180	1	13.00 cm	12.00 cm	1.80 cm	0.045 kg
● exp. from week 07	3.00 m	8.29 €	79190	4040849791901	79193	4040849791932	79194	4040849791949	120	1	14.00 cm	13.00 cm	2.00 cm	0.074 kg
● exp. from week 07	5.00 m	9.99 €	79195	4040849791956	79196	4040849791963	79197	4040849791970	100	1	14.00 cm	13.00 cm	2.50 cm	0.104 kg
● exp. from week 07	7.50 m	11.99 €	79214	4040849792144	79215	4040849792151	79227	4040849792274	70	1	13.50 cm	12.50 cm	3.00 cm	0.154 kg
● exp. from week 07	10.00 m	14.99 €	79228	4040849792281	79229	4040849792298	79230	4040849792304	60	1	14.00 cm	13.00 cm	3.80 cm	0.202 kg
● exp. from week 07	15.00 m	18.49 €	79231	4040849792311	79232	4040849792328	79233	4040849792335	30	1	15.00 cm	14.00 cm	4.60 cm	0.300 kg
● exp. from week 07	20.00 m	29.99 €	79242	4040849792427	79243	4040849792434	79244	4040849792441	20	1	17.00 cm	16.00 cm	5.00 cm	0.400 kg
● exp. from week 07	30.00 m	34.99 €	79245	4040849792458	79246	4040849792465	79247	4040849792472	10	1	18.00 cm	17.00 cm	5.10 cm	0.610 kg

Ultra-Flexible CAT 6A Patch Cable S/FTP (PiMF)

copper conductor (CU), halogen-free TPE cable sheath (LSZH)



The new flexibility:

CAT cable with ultra-flexible TPE sheath for easy handling and especially effective LSZH protection

Simply connected:

Double-shielded LAN cable with 2x RJ45 plugs for connecting network components at home, in the office, in the server cabinet, etc.

Fast, faster, CAT 6A:

As a CAT 6A network cable, suitable for 10 Gigabit Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T, 10/100/1000/10000 Mbit/s

S/FTP overall shielding:

Aluminium foil shielding around the individual wire pairs (PiMF) and aluminium braided shielding under the cable sheath

Top quality:

High-quality copper conductor (CU) and 3 μ gold-plated contact surfaces for a high-performance connection, as well as length indication on the overmoulded slimline bend protection sleeve

Always a favourite with LSZH:


Compliant with the applicable standards IEC 60332-1 (flame retardant), IEC 61034 (low smoke) and IEC 60754-2 (halogen-free)

The internet cable is suitable for Power over Ethernet (PoE, PoE+)




Ultra-Flexible CAT 6A Patch Cable S/FTP (PiMF)


copper conductor (CU), halogen-free TPE cable sheath (LSZH)

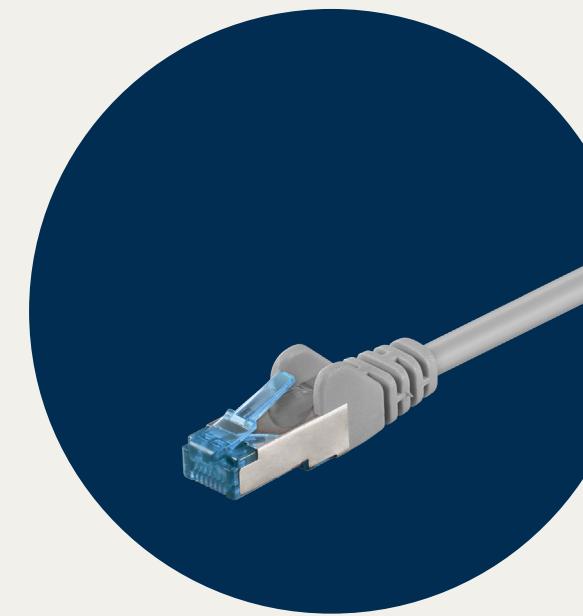

Grey

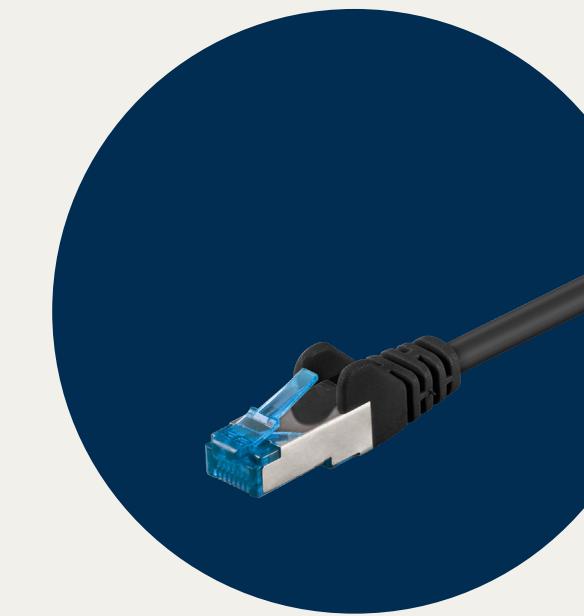

Black

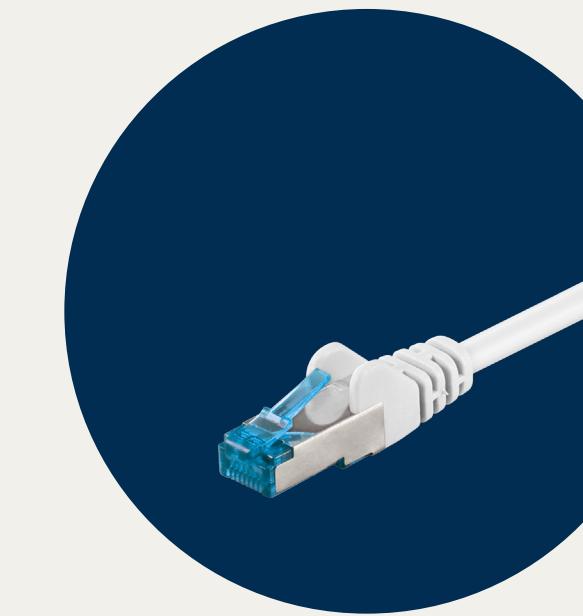

White



Availability	Cable length	RRP	Packaging: Cable Tag											
			Item no.	EAN	Item no.	EAN	Item no.	EAN	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	0.25 m	7.29 €	79248	4040849792489	79249	4040849792496	79250	4040849792502	500	1	27.00 cm	1.50 cm	1.50 cm	0.017 kg
● exp. from week 07	0.50 m	7.79 €	79263	4040849792632	79264	4040849792649	79265	4040849792656	250	1	11.00 cm	10.00 cm	1.50 cm	0.026 kg
● exp. from week 07	1.00 m	8.79 €	79284	4040849792847	79285	4040849792854	79286	4040849792861	180	1	13.50 cm	12.50 cm	1.50 cm	0.047 kg
● exp. from week 07	2.00 m	10.79 €	79318	4040849793189	79319	4040849793196	79320	4040849793202	120	1	13.00 cm	12.00 cm	2.00 cm	0.074 kg
● exp. from week 07	3.00 m	12.79 €	79342	4040849793424	79343	4040849793431	79344	4040849793448	90	1	14.00 cm	13.00 cm	2.30 cm	0.106 kg
● exp. from week 07	5.00 m	14.79 €	79345	4040849793455	79346	4040849793462	79360	4040849793608	60	1	14.00 cm	13.00 cm	3.00 cm	0.170 kg
● exp. from week 07	7.50 m	17.29 €	79361	4040849793615	79371	4040849793714	79372	4040849793721	40	1	15.00 cm	14.00 cm	3.30 cm	0.248 kg
● exp. from week 07	10.00 m	18.79 €	79373	4040849793738	79399	4040849793998	79400	4040849794001	40	1	17.00 cm	16.00 cm	4.00 cm	0.325 kg
● exp. from week 07	15.00 m	21.79 €	79401	4040849794018	79413	4040849794131	79414	4040849794148	25	1	17.00 cm	16.00 cm	5.00 cm	0.484 kg
● exp. from week 07	20.00 m	26.79 €	79415	4040849794155	79416	4040849794162	79417	4040849794179	20	1	18.00 cm	17.00 cm	5.80 cm	0.635 kg
● exp. from week 07	30.00 m	36.29 €	79418	4040849794186	79419	4040849794193	79420	4040849794209	10	1	20.00 cm	19.00 cm	6.00 cm	0.960 kg

Digital Soldering Station 70 W

160–480 °C, heats up to soldering temperature in just 8 seconds and to maximum temperature in 11 seconds



The soldering station is ideal for precision work in electronics and model making, as well as for pyrography

Heats up in a flash: The soldering iron reaches its maximum temperature of 480 °C in approx. 11 seconds, which is significantly faster than conventional soldering stations

Precise and handy: The up and down buttons allow you to control the soldering temperature in precise 1 °C increments

Convenient: With the CH button, you can save an individual temperature to which the station automatically heats up when switched on

Includes soldering iron with union nut for quick soldering tip replacement, cable length to soldering station and cable length power cord with type E/F plug: 1.15 m each

Fully equipped: With large, easy-to-read LED display, soldering sponge, cleaning brush and solder holder

The impact-resistant housing ensures exceptional durability




Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	78624	4040849786242	99.99 €	20	1	19.00 cm	22.00 cm	12.00 cm	0.475 kg



Soldering Set Starter, 12 Pcs.

with soldering iron, 5x additional soldering tips, soldering iron holder, desoldering pump, wire stripper, tweezers, soldering sponge and solder

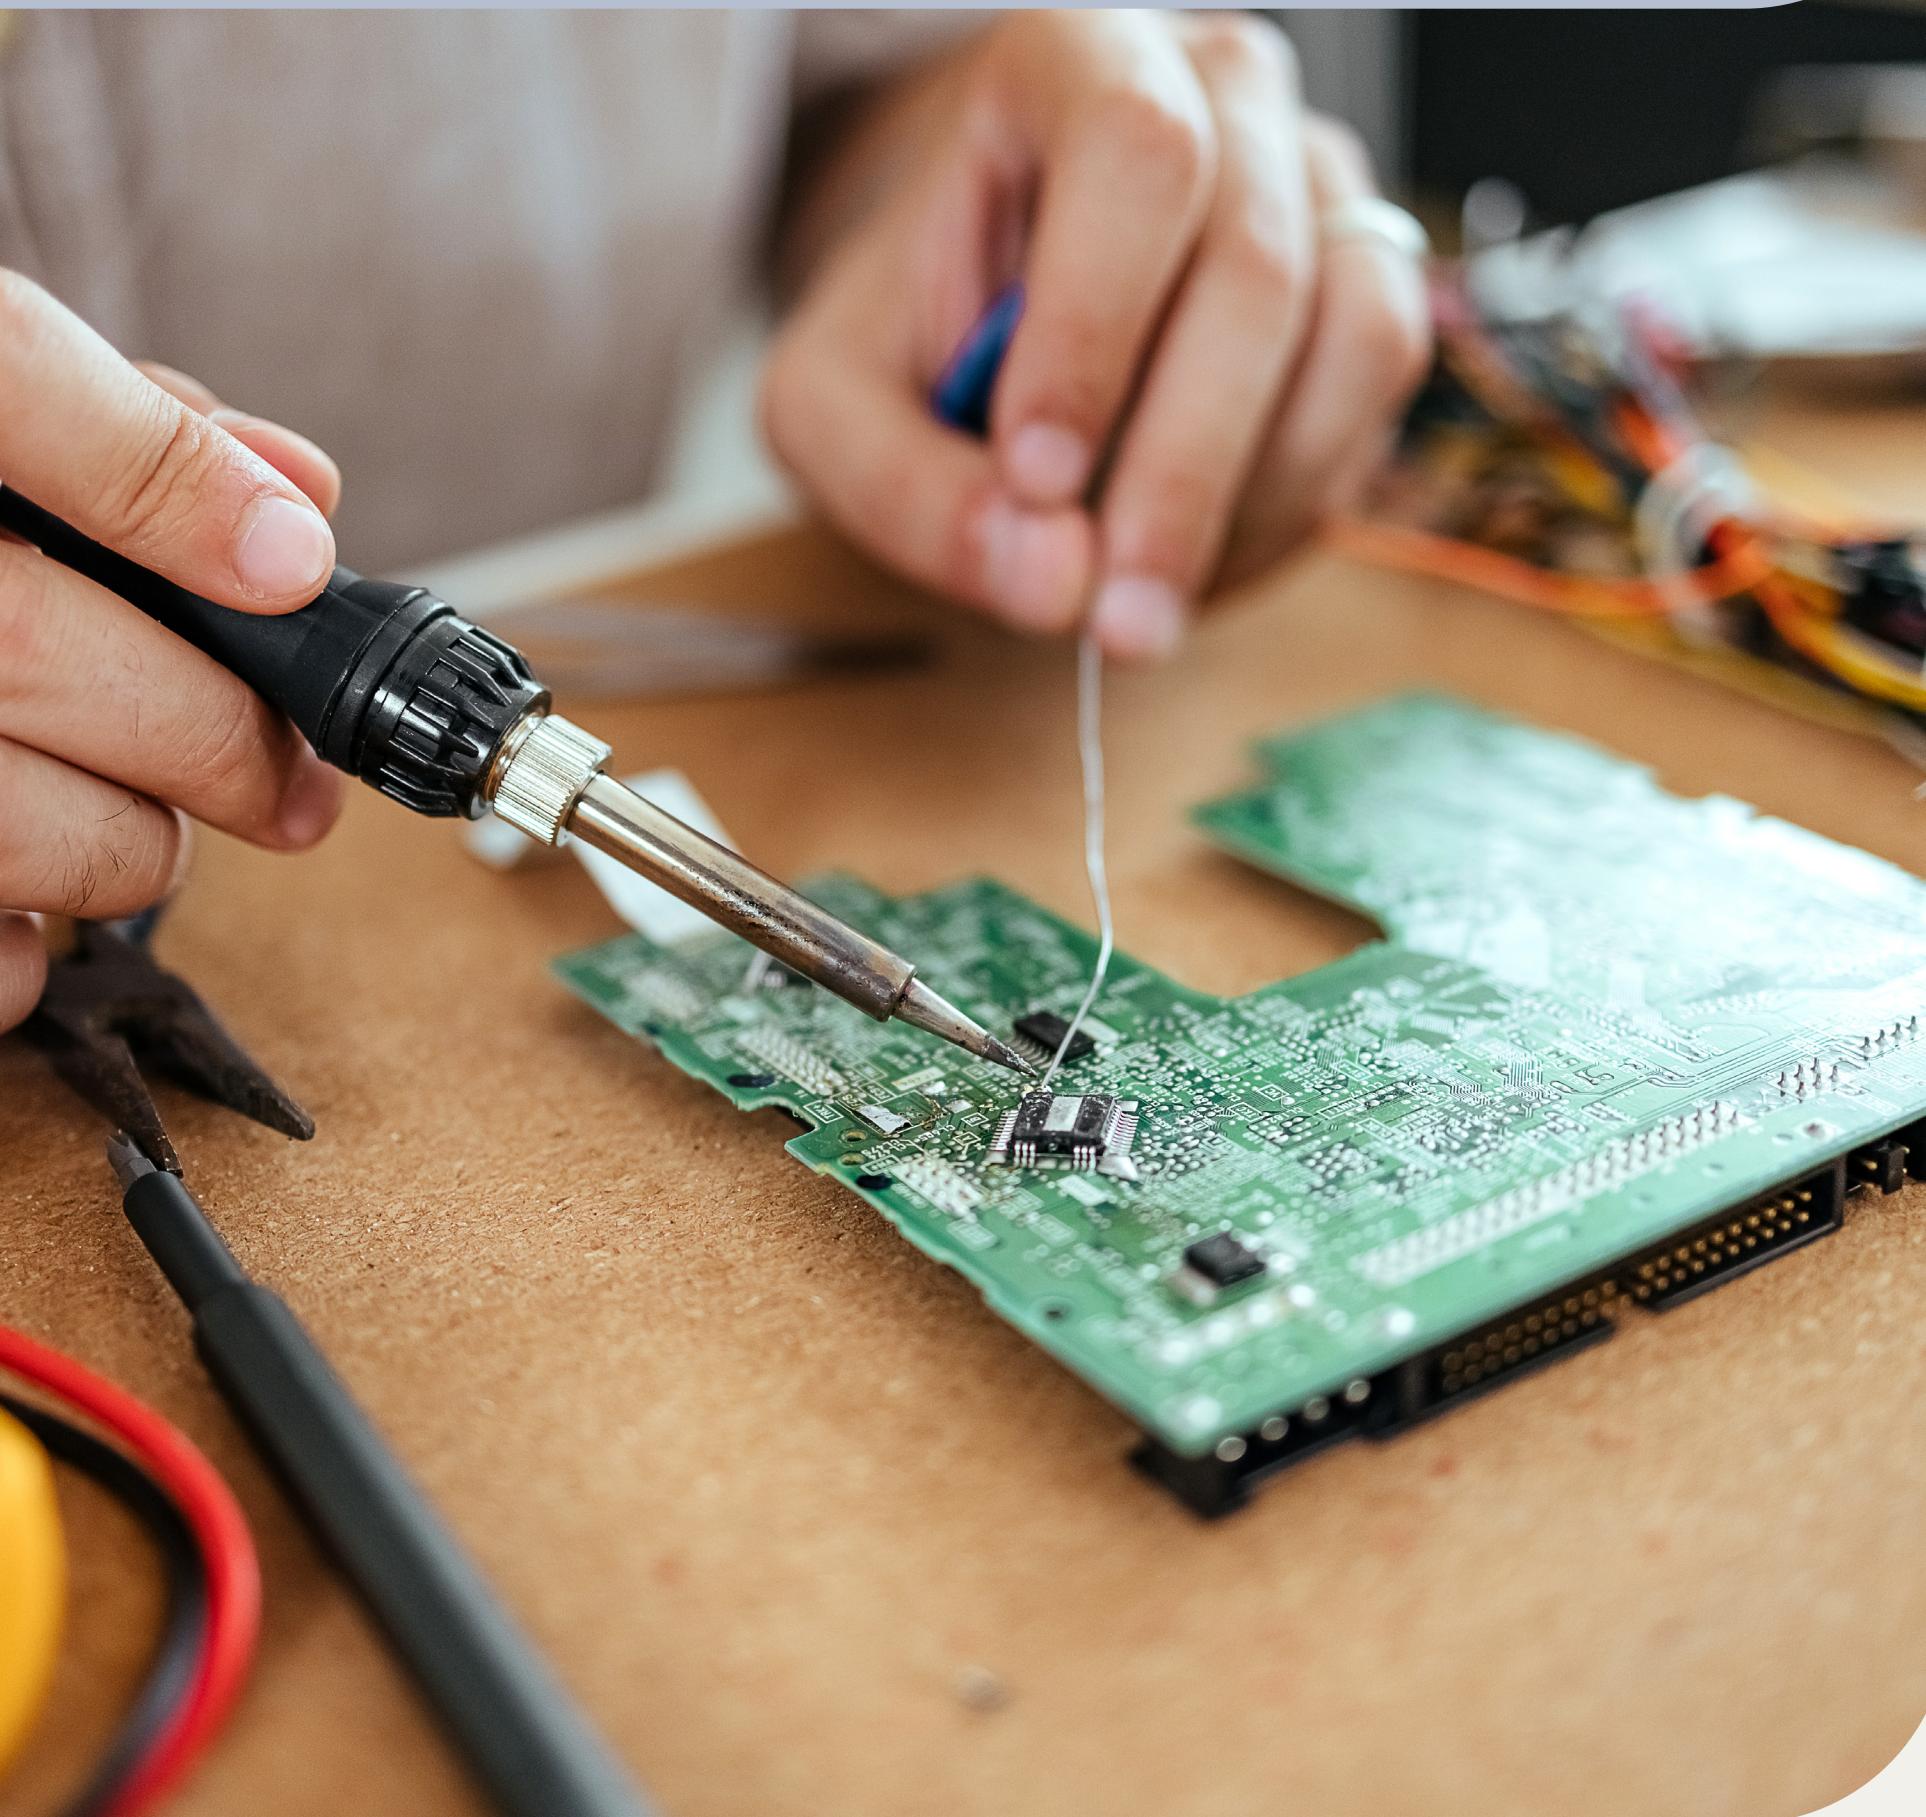

12 pcs.

Compact tool case (25 x 15 x 4 cm) for home and travel – ideal for precision work in electronics and model making, as well as for pyrography

The soldering iron with 5 heat settings is perfect for small repairs and soft soldering at 100–500 °C (25–60 W) on circuit boards, household appliances and electronics

1x solder ø 1.0 mm 10 g (99.3 % tin, 0.7 % copper), 1x wire stripper for cables, 1x soldering iron holder with sponge for safe storage of the hot soldering iron

1x light metal desoldering pump for removing and sucking up excess solder, flux and soft solder – easy to operate with one hand

1x antistatic tweezers for safe soldering on PCBs and electronics – without the risk of static electricity (length: 12.2 cm)

Soldering iron with union nut for quick soldering tip replacement, incl. soldering tip (conical) and 5x additional soldering tips: 2x conical, 2x 45° bevelled, 1x blade

The soldering iron is designed for mains operation with 220–240 V (AC), cable length 1.20 m, safety plug (type E/F)



Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	77995	4040849779954	24.99 €	20	1	3.70 cm	12.00 cm	26.00 cm	0.475 kg

Solder Lead-Free, Ø 0.8 mm

content: 0.3 % silver, 0.7 % copper, 99 % tin,
content of flux core: 2.5 %, melting point 217 °C



Flux-filled solder wire with a diameter of 0.8 mm, ideal e.g. for soldering electronics

Simple, homogeneous wetting of the solder joint thanks to the rosin flux core

No-clean solution with continuous flux cores that does not require cleaning the solder joint after use

Reduced spattering for increased user safety and protection of the workpiece

Halogen-free and with low smoke emission

Perfect for soft soldering at low temperatures up to 450 °C in the automated and hand soldering area

goobay®




Packaging: Bulk

Availability	Weight	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 04	20 g	77421	4040849774218	4.99 €	180	1	4.50 cm	4.50 cm	2.70 cm	0.106 kg
● exp. from week 04	50 g	77422	4040849774225	9.99 €	180	1	4.50 cm	4.50 cm	2.70 cm	0.106 kg

Soldering Tools, 6 Pcs.

special tools for soldering work on electronics and circuit boards

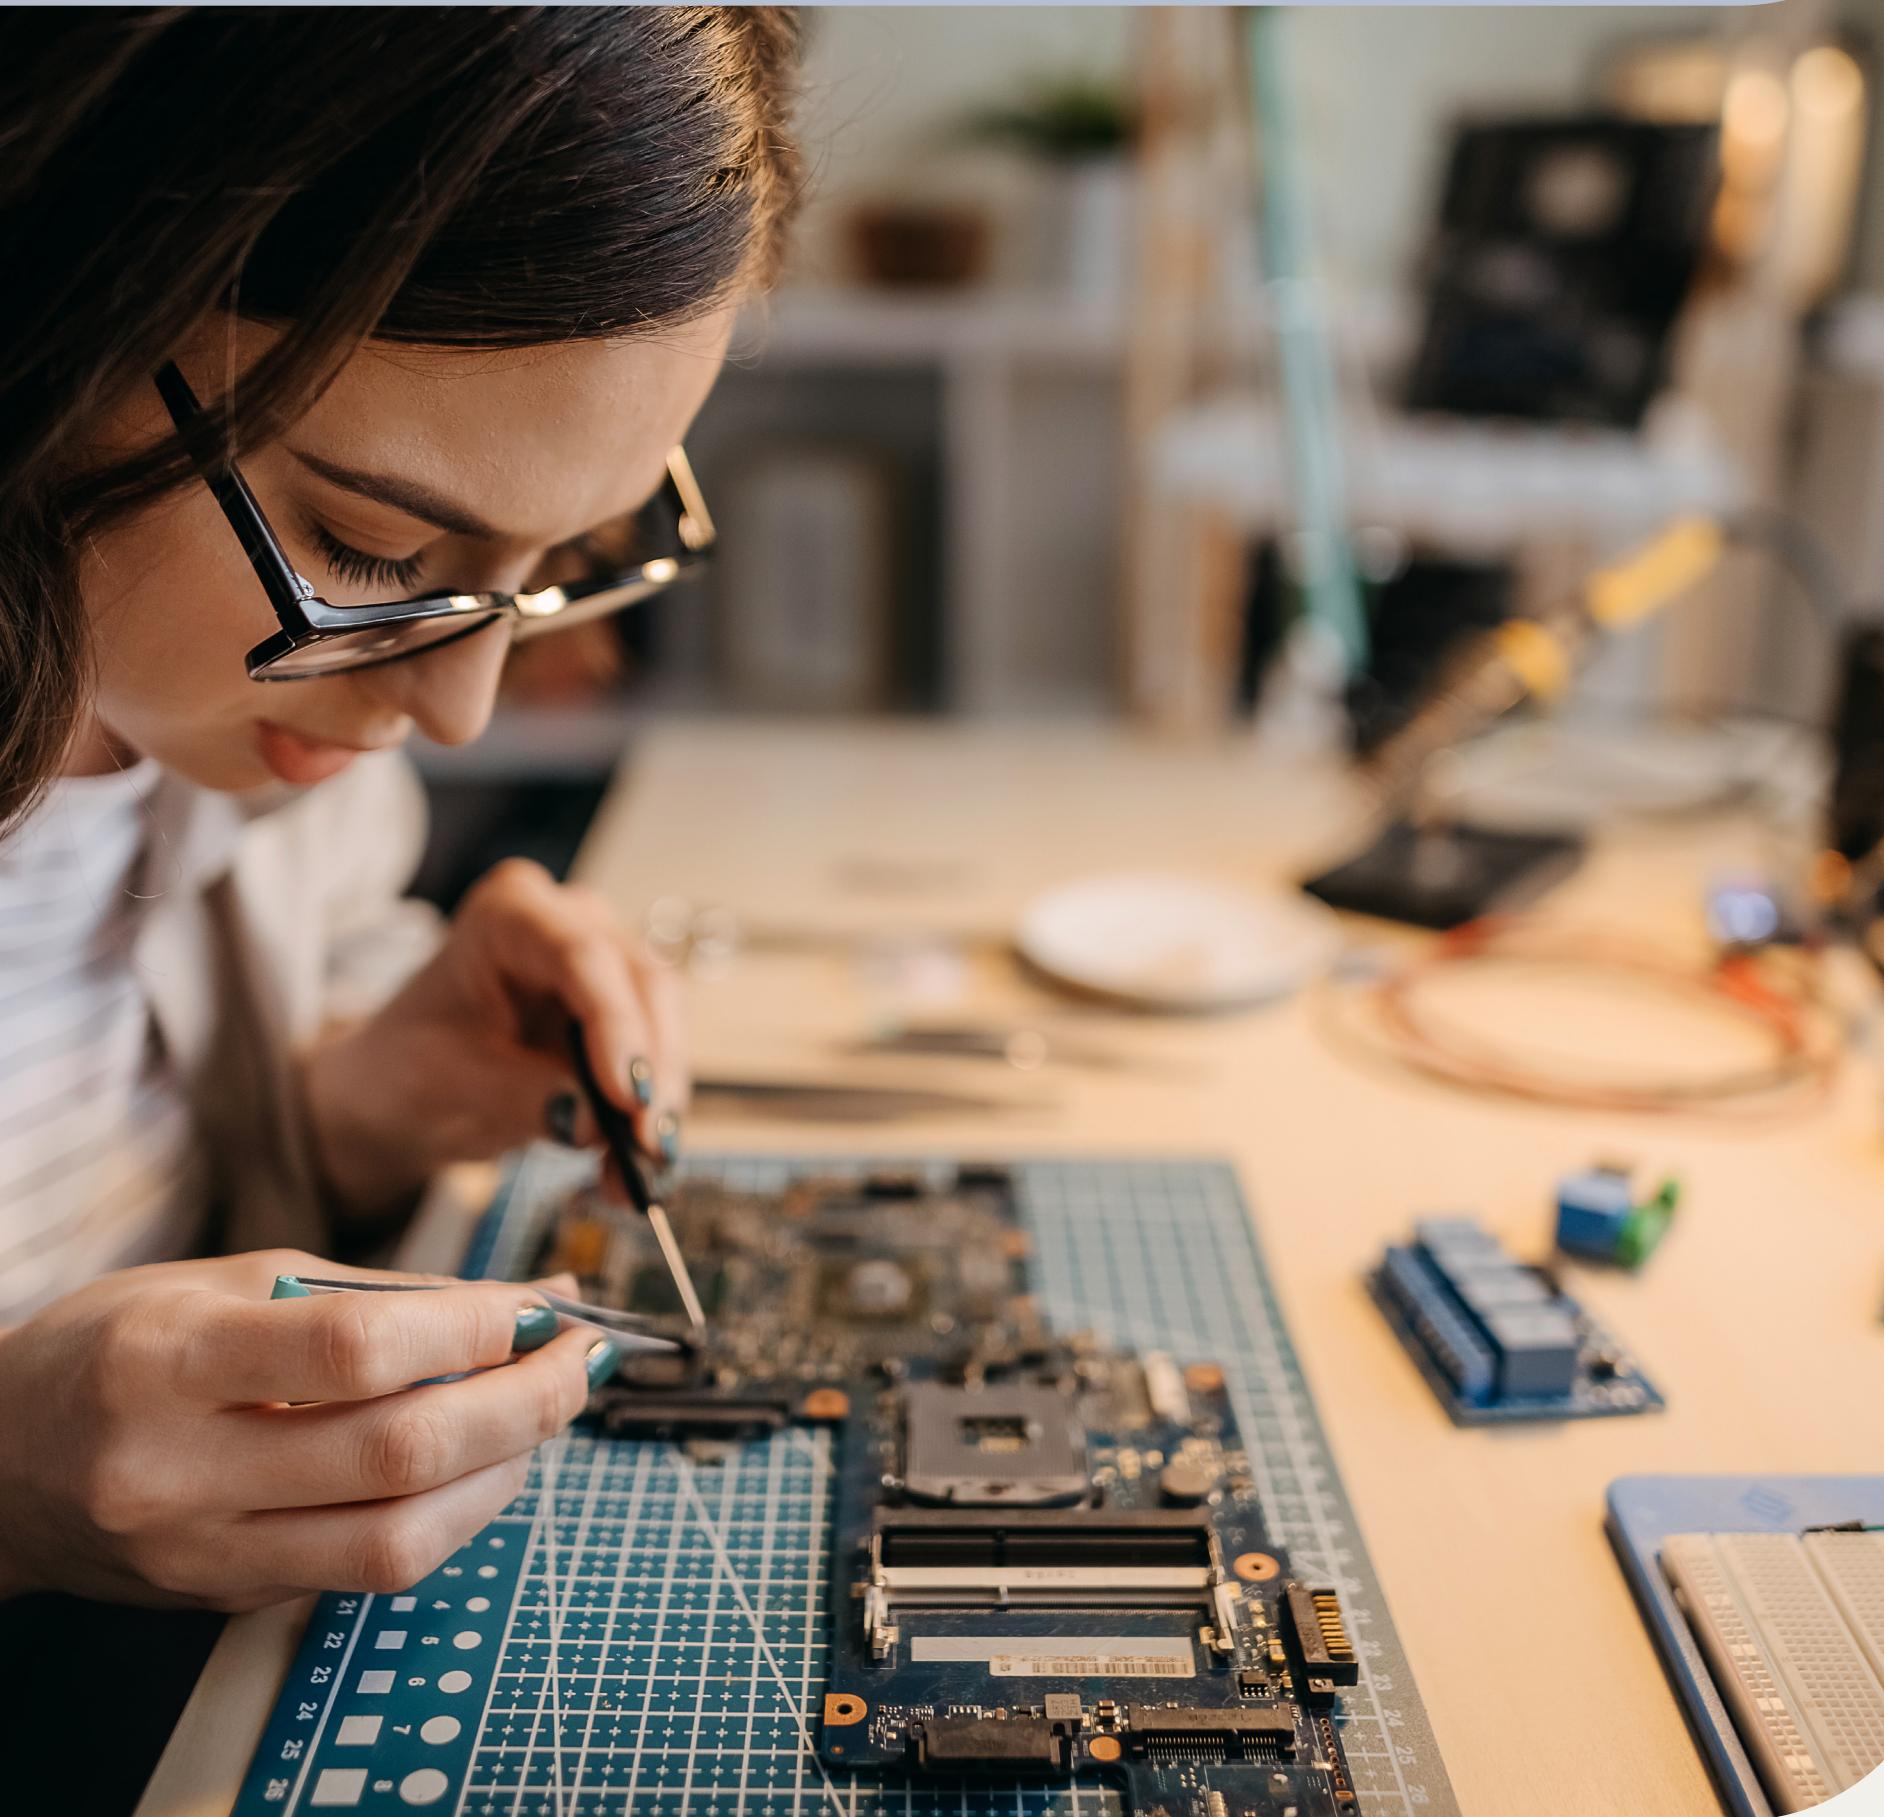

6 pcs.

Handy, double-sided soldering kit for working on circuit boards, cleaning small metal parts, precision work such as jewellery repair, model making, etc.

2x brushes for removing loose parts, 1x 3 mm screwdriver, 1x cutting tool for PCBs and stripping, 1x fork for gripping and bending wires

2x chip holders, 1x reamer with round cross-section for cleaning circuit board holes, 1x lever and 1x hook for prising out circuit board parts, 2x pointed scrapers for removing corrosion

The circuit board cleaners are coated and non-magnetic: This prevents metal parts from accidentally sticking to the tool, makes placement easier and prevents damage to electronic chips or coils

Handles with hexagonal cross-section ensure improved grip of the soldering aids without slipping or twisting during work

Dimensions: Each tool is approx. 18.2 cm long



goobay®




Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	77999	4040849779992	7.99 €	100	1	7.00 cm	7.30 cm	4.60 cm	0.090 kg

Magnetic Circuit Board Holders and Metal Plate

4x magnets (15 x 47 mm) for a stable hold of the circuit board during soldering work

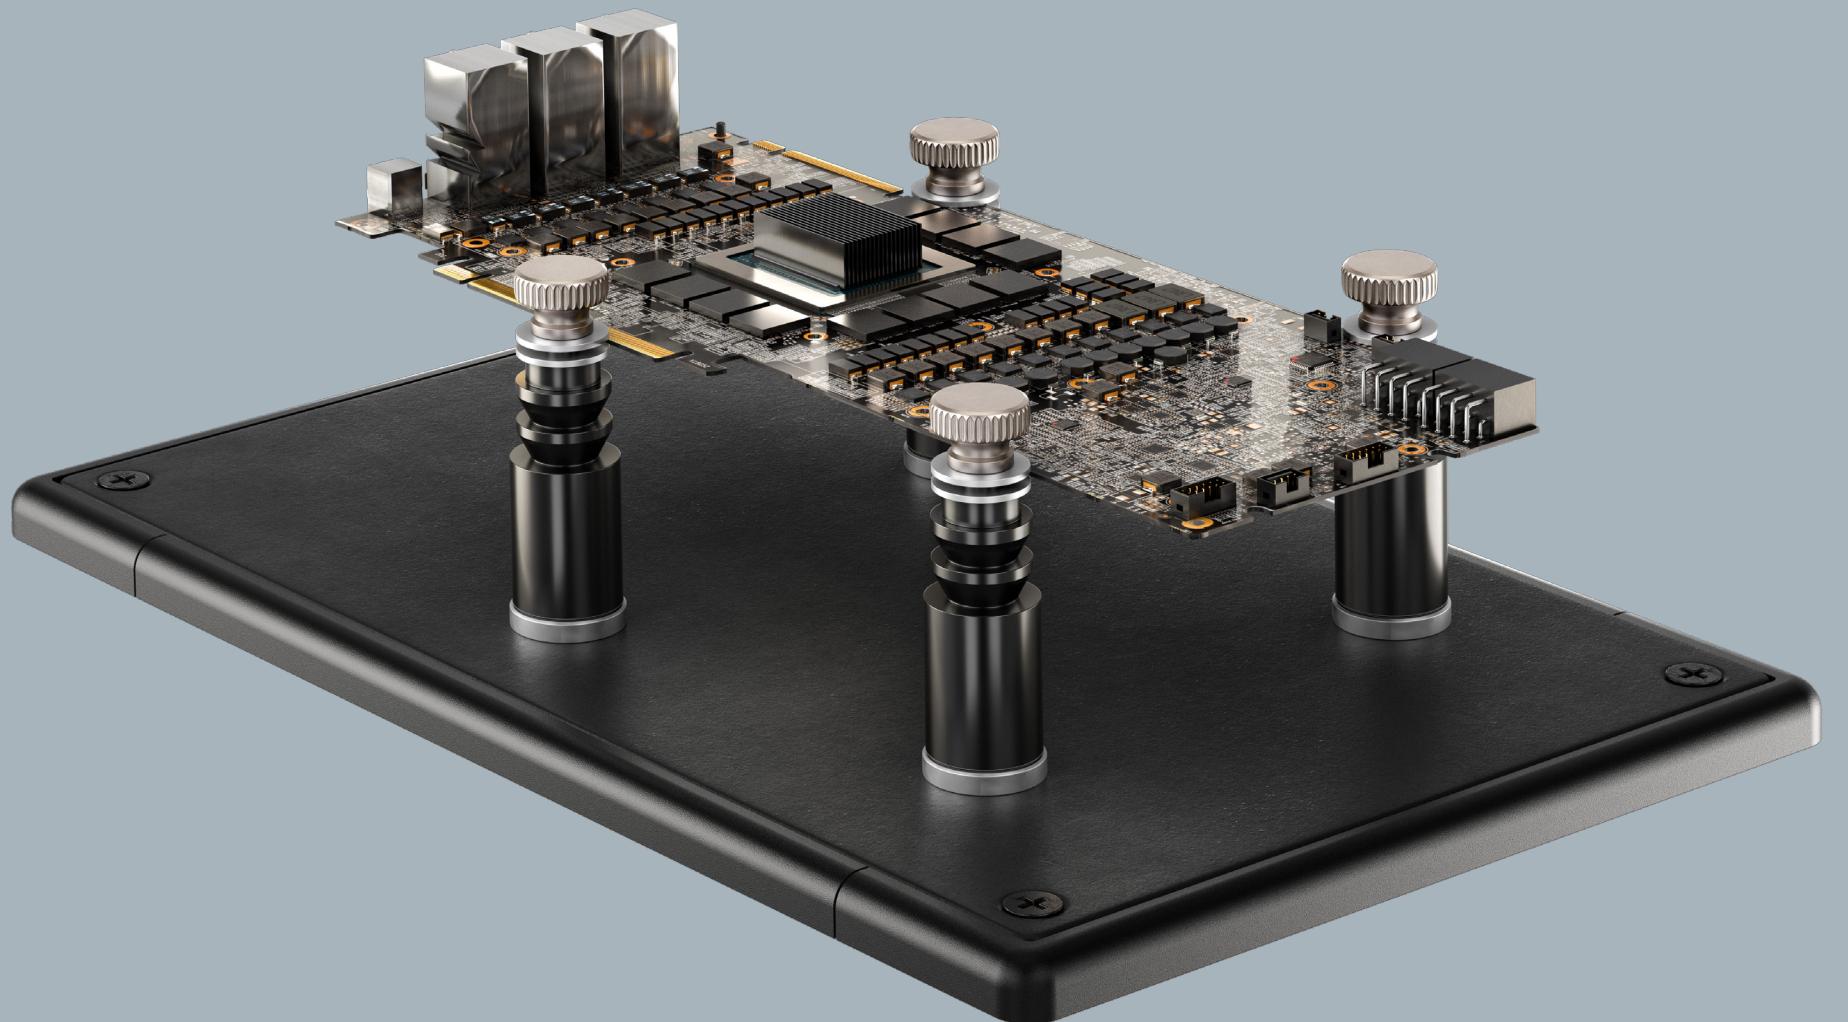

Both hands free for soldering: Circuit board holder with side notches that hold the boards securely and precisely during soldering work

The extremely strong magnets ensure a completely secure hold on metal surfaces without the workpiece slipping or shifting

Particularly suitable as a soldering aid for small and light circuit boards that are otherwise difficult to secure

Suitable for circuit board thicknesses up to 4 mm: The individual magnets can be readjusted with the integrated screw in each notch

With sturdy metal plate that is heavy enough to prevent it from slipping during soldering work (dimensions: 210 x 135 x 10 mm)

Secure hold even in case of strong impact: The screws of the magnetic feet can be inserted into the rails of the plate with keyhole slots, so that the magnets cannot slip

Non-slip rubber nubs on the feet of the soldering aid ensure a secure stand

goobay®




Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	77998	4040849779985	11.99 €	20	1	14.00 cm	22.00 cm	2.80 cm	0.475 kg

Magnetic Circuit Board Holders

4x magnets (15 x 47 mm) for a stable hold of the circuit board during soldering work

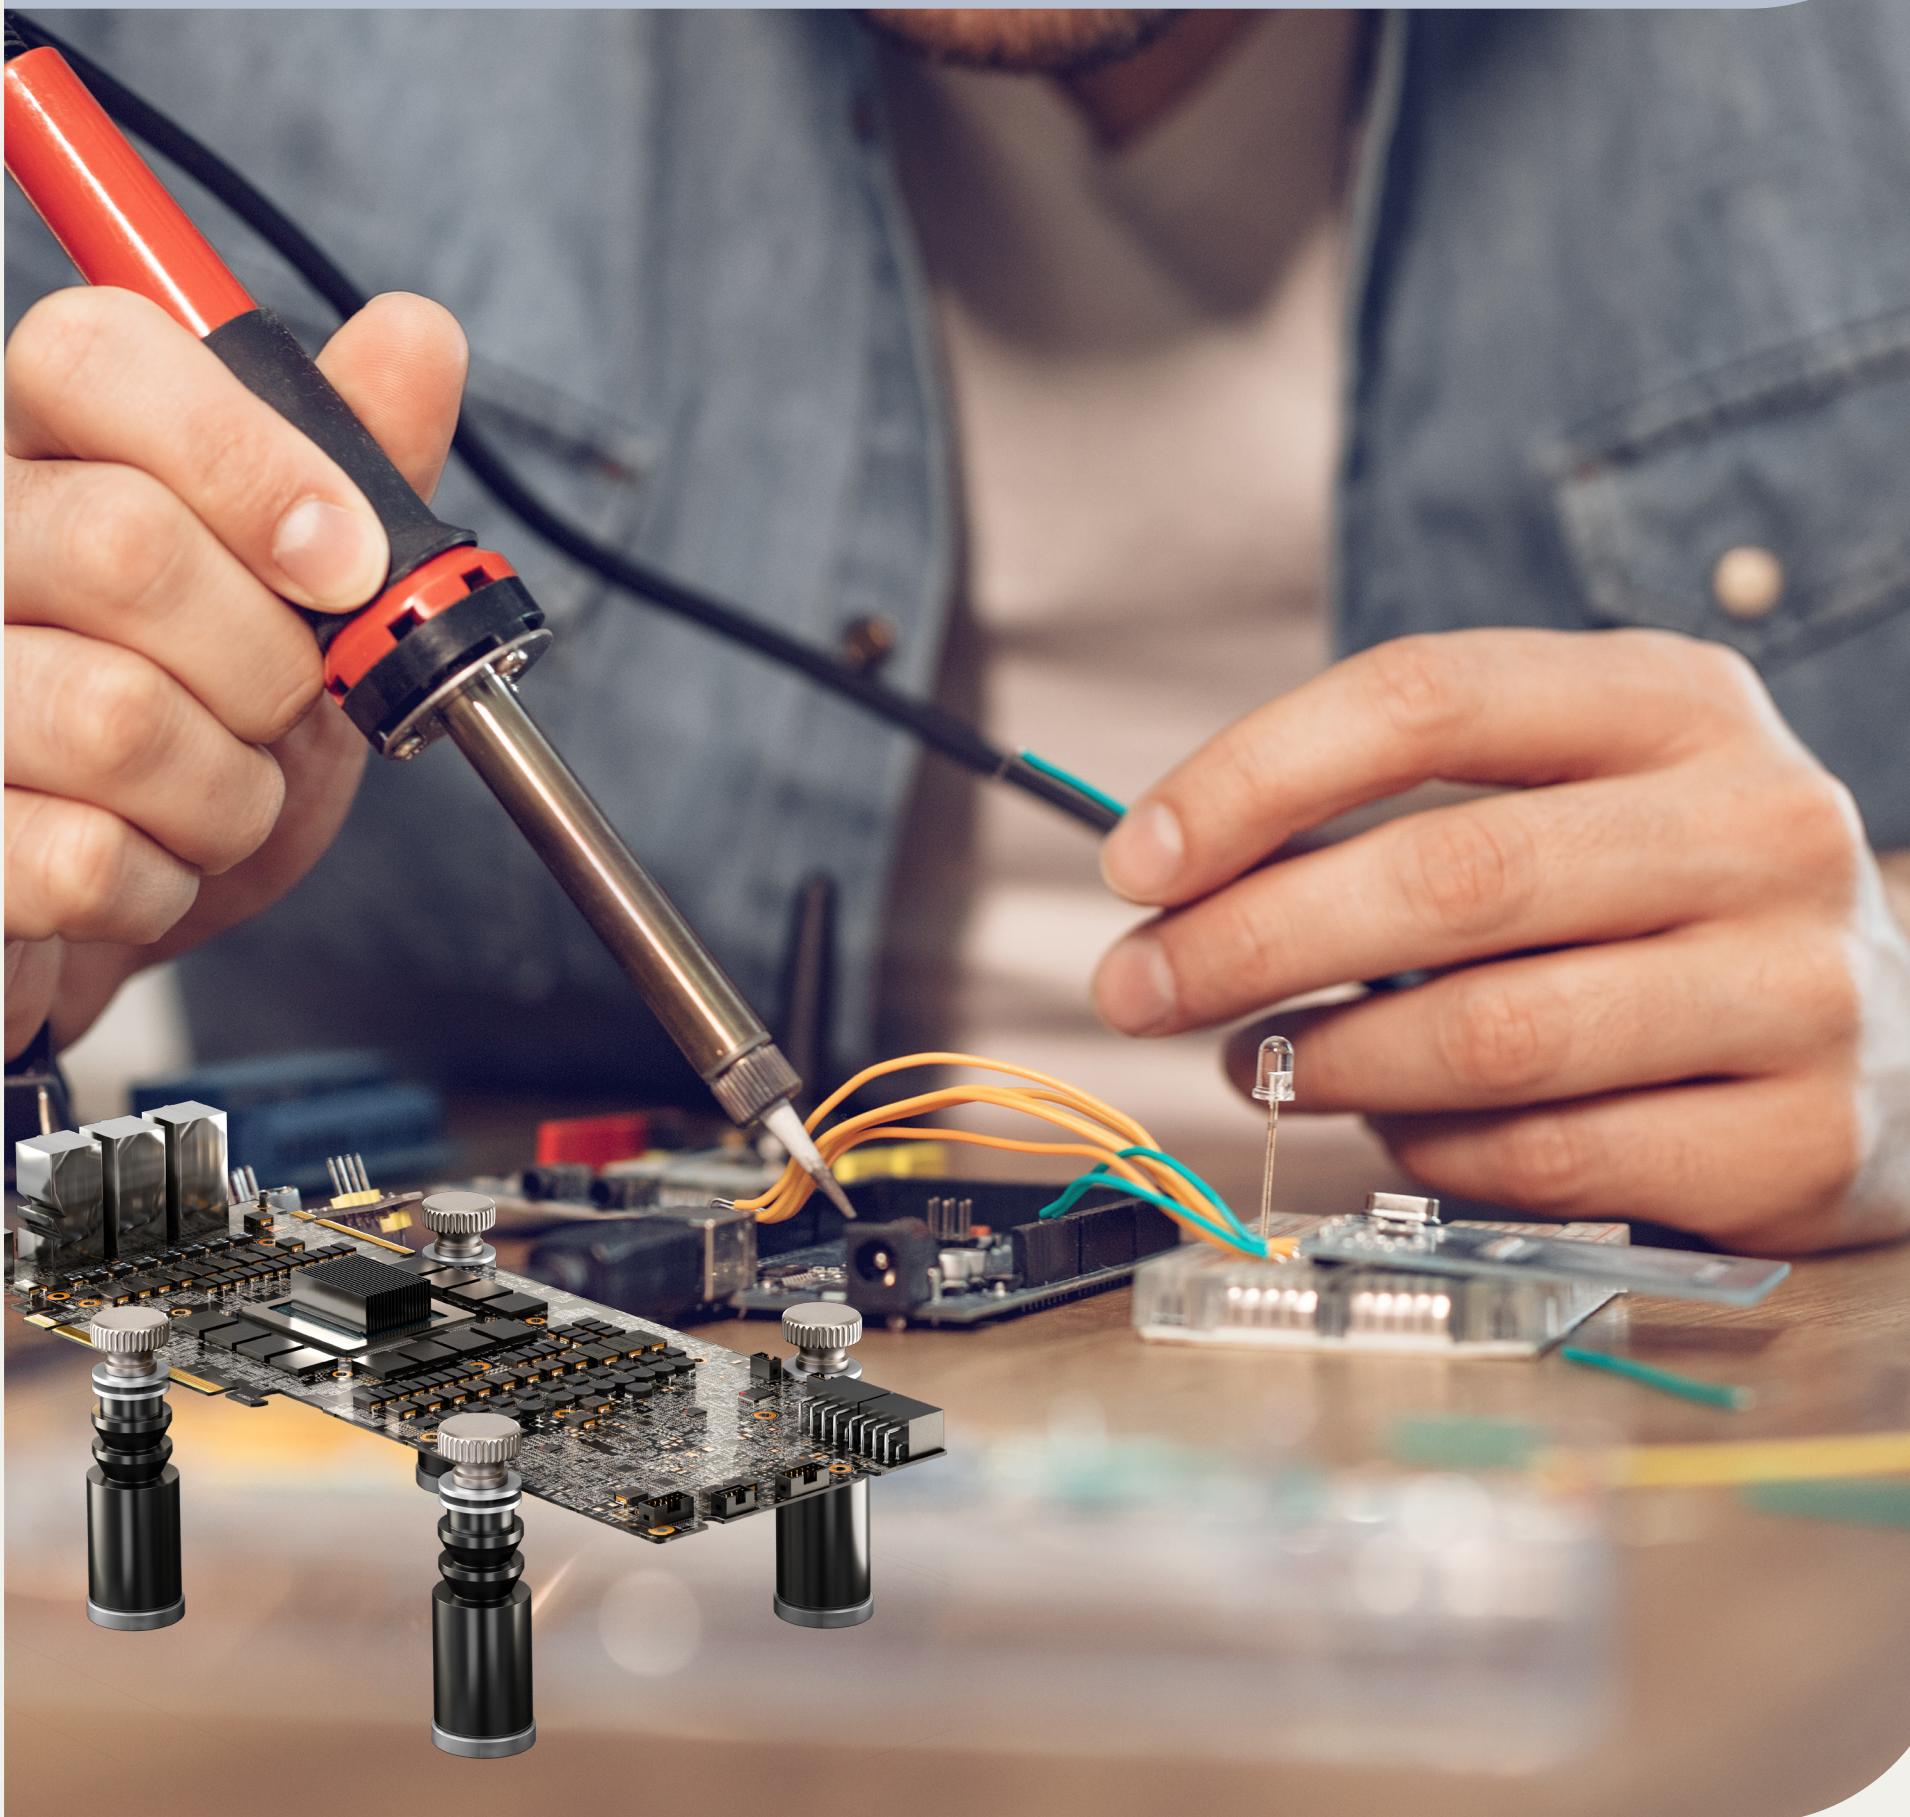

Both hands free for soldering: Circuit board holder with side notches that hold the boards securely and precisely during soldering work

The extremely strong magnets ensure a completely secure hold on metal surfaces without the workpiece slipping or shifting

Particularly suitable as a soldering aid for small and light circuit boards that are otherwise difficult to secure

Suitable for circuit board thicknesses up to 4 mm: The individual magnets can be readjusted with the integrated screw in each notch

goobay®



Packaging: Retail Box

Availability	Item no.	EAN	RRP	Pcs./master carton	Pcs./PU	Length	Width	Height	Weight
● exp. from week 07	77997	4040849779978	7.49 €	100	1	3.50 cm	4.50 cm	2.00 cm	0.090 kg

Our principle

**"A good deal
should be
win-win!"**



wentronic

**Thank you for
taking an interest**

If you have any questions or are interested in joint marketing campaigns, we look forward to hearing from you. Please feel free to contact us at any time.

Wentronic GmbH
Pillmannstraße 12
38112 Braunschweig
Tel/Fax: +49 (0)531-21058-0 /-22
www.wentronic.com