
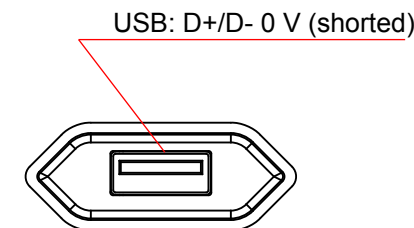
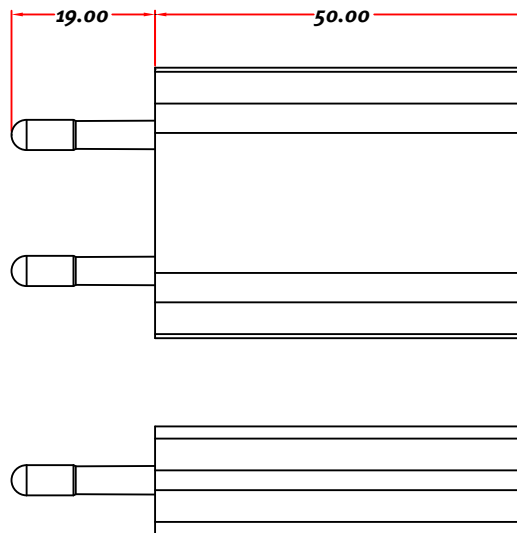
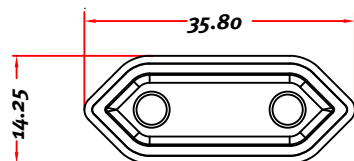


Ladediagramm
Charging diagram

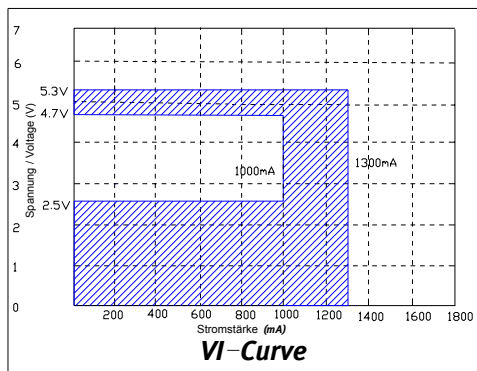

Nr. / No.	Farbe / Colour	Verpackung / Packaging
43749		BOX
43750		PL
43747		BOX
43748		PL

USB Lade-Adapter 230 V -> USB (1 A)
 USB Reiseladeadapter
 - EURO-Stecker > USB A-Buchse
 - Eingang: 100-240 V~ 50/60 Hz 0.2 A
 - Ausgang: USB 5 V= 1 A max.
 - Schutzklasse II
 - Stand-by Leistung: <0.3 W
 - Gewicht: 24 g
 - RoHS-konform

USB Charger 230 V -> USB (1 A)
 USB Travel charger
 - EURO plug > USB A socket
 - Input: 100-240 V~ 50/60 Hz 0.2 A
 - Output: USB 5 V= 1 A max.
 - Protection class II
 - Stand-by power: <0.3 W
 - Weight: 24 g
 - RoHS compliant

Änderungen

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	13.02.2014	tf	I
15.08.2018	tf	gepr.:	13.02.2014	tf	
		Norm:			J
		Änderungen vorbehalten / Subject to change		Zeichnungs-Nr.:	

TRA USB - 230 V 1.0 A (ultra-slim)



von