


F/UTP 4pairs cable category5e - PE sheath

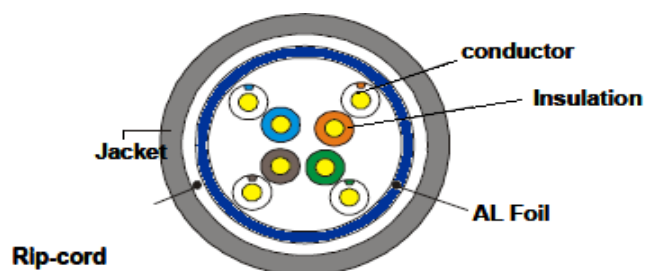

COLOUR:

BLUE-WHITE/BLUE

ORANGE-WHITE/ORANGE

GREEN-WHITE/GREEN

BROWN-WHITE/BROWN



CABLE DESCRIPTION

1-CONDUCTOR

TYPE:SOLID-Copper clad aluminum wire

DIAMETER:7*0.15±0.005mm

AWG:26/7

2-INSULATION

TYPE:PE solid

DIAMETER:0.9mm±0.01mm

3-Drain wire : 0.45mm CCA**4-SHIELDING:Aluminium/polyester**

Coverage 110%

5-RIP CORD

YES

6-OUTER JACKET

TYPE:PE

COLOUR:BLACK

THICKNES:0.6mm

EXTERNAL DIAMETER:5.7mm±0.2mm

PASS 40m FLUKE TEST

Operating temperature: -20 - 75°C

PARAMETER

UNIT

VALUE

Max.linear tesistance.

 Ω /km

≤380

Mutual capacity(nom.)

pF/m

50

Unbalance capacity max

pF/km

1600

Characteristic impedance
(1 at 100 MHz) Ω

100±15

VELOCITY OF PROPAGATION
(f>1MHz)

%of c

66

Marking

CAT 5e outdoor network cable, F/UTP, black
CCA copper mixture for SOHO application, AWG 26/7
(stranded), PE

ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Return loss(dB)	Attenuatin (dB/100m)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)
1			65,3	62,3	63,8	60,8
4			56,3	53,3	51,8	48,8
10			50,3	47,3	43,8	40,8
16			47,2	44,2	39,7	36,7
20			45,8	42,0	37,8	34,8
25			44,3	41,3	35,8	32,8
31,25			42,9	39,9	33,9	30,9
62,5			38,4	35,4	27,9	24,9
100			35,3	32,3	23,8	20,8

OTHER CHARACTERISTICS

MINIMUM BENDING RADIUS:10×Diameter

PACKING:100m/ROLL



Wentronic GmbH
Pillmannstraße 12
38112 Braunschweig