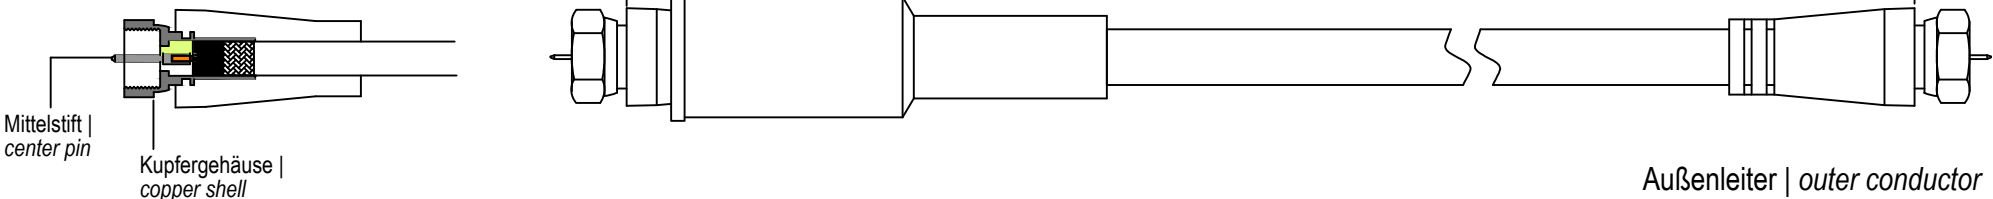
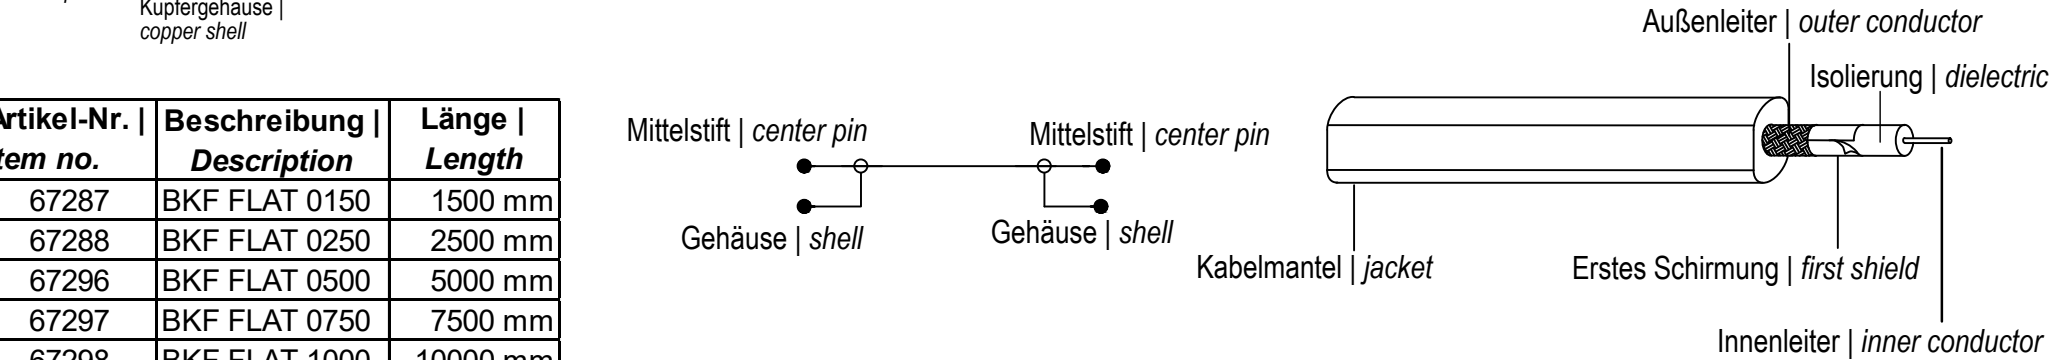
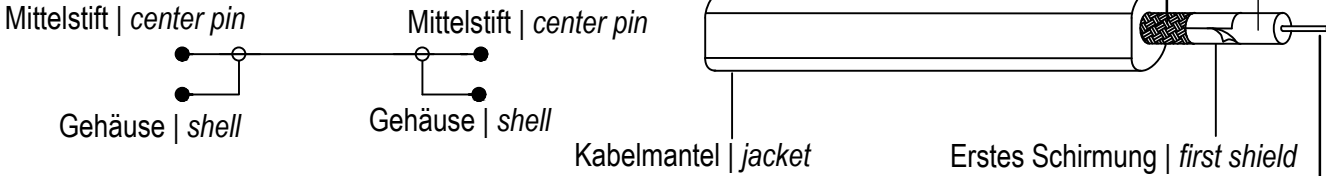


1	2	3	4	5	6	7	8	9	10	11	12	13	14																			
A	Länge Length													A																		
B														B																		
C														C																		
D	<table><tr><th>Artikel-Nr. Item no.</th><th>Beschreibung Description</th><th>Länge Length</th></tr><tr><td>67287</td><td>BKF FLAT 0150</td><td>1500 mm</td></tr><tr><td>67288</td><td>BKF FLAT 0250</td><td>2500 mm</td></tr><tr><td>67296</td><td>BKF FLAT 0500</td><td>5000 mm</td></tr><tr><td>67297</td><td>BKF FLAT 0750</td><td>7500 mm</td></tr><tr><td>67298</td><td>BKF FLAT 1000</td><td>10000 mm</td></tr></table>			Artikel-Nr. Item no.	Beschreibung Description	Länge Length	67287	BKF FLAT 0150	1500 mm	67288	BKF FLAT 0250	2500 mm	67296	BKF FLAT 0500	5000 mm	67297	BKF FLAT 0750	7500 mm	67298	BKF FLAT 1000	10000 mm											D
Artikel-Nr. Item no.	Beschreibung Description	Länge Length																														
67287	BKF FLAT 0150	1500 mm																														
67288	BKF FLAT 0250	2500 mm																														
67296	BKF FLAT 0500	5000 mm																														
67297	BKF FLAT 0750	7500 mm																														
67298	BKF FLAT 1000	10000 mm																														
E														E																		
F	Flaches SAT-Antennenkabel (80 dB), doppelt geschirmt, wettergeschützt - Doppelt geschirmtes Satellitenkabel für eine störungsfreie Übertragung - Wetterschutzhülle schützt vor Staub, Schmutz und mechanischer Belastung. - Leitfähigkeit des Koaxialkabels bleibt besonders lange erhalten, da vergoldete Kontakte nicht korrodieren Anschlüsse: 2x F-Stecker Material Kontakte: vergoldet Material Kabekmantel: PVC Material Innenleiter: CU (Kupfer) Kabelmantel: Ø 3,8 mm Innenleiter Aderdurchmesser: Ø 0,4 mm Anzahl Schirmungen: 2x Typ 1: Aluminiumfolie Typ 2: Geflecht ALu 112x Kabelmantel Höhe: 3,8 mm Kabelmantel Breite: 7,2 mm Schirmungsmaß: 80 dB Wellenwiderstand: 75 Ω Flat SAT Antenna Cable (80 dB), Double Shielded, Weather Protected - Double shielded satellite cable for interference-free transmission - Weather protection cover protects against dust, dirt and mechanical stress. - Long-term conductivity of the coaxial cable is guaranteed as gold-plated contacts do not corrode Connections: 2x F male Material contact: gold-plated Material jacket: PVC Material inner conductor: CU (copper) Jacket: Ø 3.8 mm Inner conductor: Ø 0.4 mm Number of shieldings: 2x Type 1: foil aluminium Type 2: braid aluminium 112x Height of cable sheath: 3.8 mm Width of cable sheath: 7.2 mm Shielding efficiency: 80 dB Impedance: 75 Ω													F																		
G														G																		
H														H																		
I	Änderungen			Datum	Name	Bezeichnung						Blatt	I																			
J	Datum	Name	gez.:	25.02.2026	ir	BKF FLAT XXXX							J																			
			gepr.:			Zeichnungs-Nr.:							von																			
			Norm:			67287ff																										
	Änderungen vorbehalten / Subject to change																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14																			