
clicktronic

USB A TO USB MINI B 2.0 ADAPTER CABLE

Transfer music, print and save with up to 480 Mbit / s and over many years. The reason: a strong plug, gold-plated connectors and a flexible double shielded premium cable.

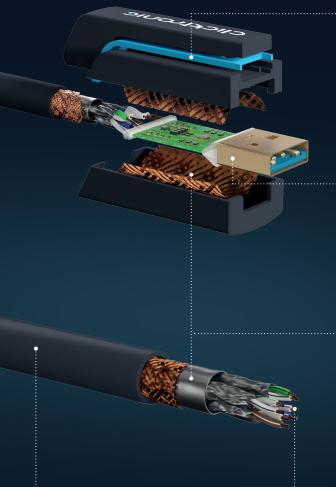

A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic USB A to USB Mini B 2.0 adapter cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic USB A to USB Mini B 2.0 adapter cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 Carat gold. This prevents them from oxidising. Plus: unlike many materials, gold is excellent at transmitting signals – for resistancefree transmission, completely without any interruptions.

DOUBLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the double shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Fast data – even after years: the inner conductors made from 99.9% oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

clicktronic

SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

clicktronie



USB A TO USB MINI B 2.0 ADAPTER CABLE

FOR FAST DATA AND OLDER DEVICES

Thanks to Hi-Speed USB 2.0, your data reaches a speed of up to 480 Mbit/s – for particularly fast printouts. As a comparison: 12 Mbit/s are standard for USB 1.0. USB 2.0 is also backwards compatible with USB 1.0 and 1.1. – ideal if printers and the like have been with you for a few years.

LOADS DATA AND CHARGES THE BATTERY

Two become one. Thanks to sync and charge, you can load data from a camera onto your laptop while also charging your battery. This makes sure your devices always have plenty of power and all of the images arrive safely.



Delete

Digital camera, MP3 player, satnav, hard drive, dashcam or PS3 controller: the Clicktronic USB A to USB Mini B 2.0 adapter cable allows you to connect MIDI and other USB-B devices to your PC, notebook or TV – a connection that is both stable and fast. Simply insert and you're ready thanks to plug and play.





ALL ADVANTAGES AT A GLANCE

SIMPLE AND FOR MANY DEVICES

Connects USB-B devices such as digital camera, MP3 player or satnav to a PC, notebook or TV – particularly easily thanks to plug and play.

FAST AND COMPATIBLE

Hi-Speed USB 2.0 transfers data with up to 480 Mbit / s and is backwards compatible with USB 1.0 and 1.1.

BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

MULTIFUNCTIONAL Transfers data and charges the battery at the same time.

NO FLICKERING Thanks to double insulation.

FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

STRONG PLUG

Cictronic

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

RUST-FREE CONNECTOR Even after years – thanks to a 24 Carat gold coating.

SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

clicktronic

clicktronie



USB A TO USB MINI B 2.0 ADAPTER CABLE


SIGNAL TRANSMISSION

TRANSMISSION TYPES: digital data MAX. TRANSMISSION RATE (Mbit/s): 480

CIRCUIT DIAGRAM

P1 USB-A	P2 MINI USB-B
P1	P1
P2 ——	P2
P3 ———	P3
P4	P5
CASING —	CASING

CABLE CROSS-SECTION



SUPPORTED STANDARDS

USB 2.0 (Hi-Speed), USB 1.0 / 1.1 (Full Speed)

PRODUCT DATA

CABLE LENGTH	\varnothing inner conductor	AWG	Ø OUTER JACKET
0.5-3m	7 × 0.12 mm	28	3.7 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
0.5 m	9.99€	1/20/40	70125	4040849701252
1.0 m	10.99€	1/20/40	70126	4040849701269
1.8 m	12.99€	1/20/40	70127	4040849701276
3.0 m	14.99€	1/20/40	70128	4040849701283



SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.



clicktronic