

SAT-Antennenkabel

F-Koaxialkabel mit einem Schirmungsmaß > 95 dB

Störungsfreier Fernsehempfang ist vor allem eine Frage des richtigen Materials. Dieses SAT Antennenkabel ist speziell für gehobene Anforderungen bei hochauflösenden Fernsehformaten entwickelt. Dank zweifacher Signalschirmung, reiner Materialien, und präziser Verarbeitung überträgt es die HDTV- und DVB-Signale verlustfrei bis zum Receiver. So sind Sie sicher, dass Ihr Erlebnis so ankommt, wie es gedacht war.

- reine Kupferleiter und 2-fach Schirmung für klare Signalqualität
- besonders geeignet für digitales Satellitenfernsehen
- 24-Karat vergoldete Kontakte für minimale Übertragungswiderstände

Technische Daten

Anschlüsse

| | |
|----------------------------------|------------------------------|
| Steckermaterial: | 3-fach umspritztes PVC / ABS |
| Kontaktmaterial: | 24-Karat-vergoldet |
| Schirmung: | ja |
| Anschluss 1, Typ: | F-Stecker |
| Anschluss 1, Steckerlänge (mm): | 39,8 |
| Anschluss 1, Steckerbreite (mm): | 14,0 |
| Anschluss 1, Steckerhöhe (mm): | 14,0 |
| Anschluss 2, Typ: | F-Stecker |
| Anschluss 2, Steckerlänge (mm): | 39,8 |
| Anschluss 2, Steckerbreite (mm): | 14,0 |
| Anschluss 2, Steckerhöhe (mm): | 14,0 |

Kabel

| | |
|-------------------------------|--|
| Typ: | Rundkabel |
| Länge (m): | 1 2 3 5 7,5 10 15 20 |
| Material Innenleiter: | OFC (sauerstofffreies Kupfer) |
| Durchmesser Innenleiter (mm): | 1 x 0,65 |
| AWG: | 22 |
| Anzahl Schirmungen: | 2 x |
| Typ 1. Schirmung: | Aluminium-Folie |
| Typ 2. Schirmung: | Kupfer-Geflecht 96 Adern x 0,12 mm Querschnitt |
| Material Außenmantel: | hochelastisches PVC |
| Durchmesser Außenmantel (mm): | 6,0 |
| Ferritkern: | beidseitig |
| Durchmesser Ferritkern (mm): | 14,0 |
| Knickschutz: | beidseitig |

Signalübertragung

| | |
|-----------------------|-------|
| Übertragungsarten: | DVB-S |
| Schirmungsmaß (dB): | > 95 |
| Wellenwiderstand (Ω): | 75 |

Allgemein

| | |
|------------------------------------|-----------|
| Betriebstemperatur von / bis (°C): | -10 / +80 |
| Garantie (Jahre): | 10 |

clicktronic®

entertainment.
pure.


casual




F-Stecker




F-Stecker



Kabelquerschnitt

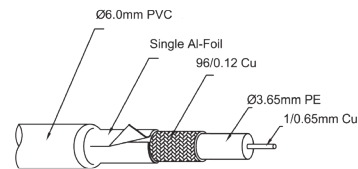

Schaltplan



Designed in
Germany

10 Years
Warranty
High-Quality
Assurance









OFC
99,99% Oxygen
Free Copper

24 Carat
Gold
Anti Resistance
Connections

2x
Cable
Shielding

SAT-Antennenkabel

F-Koaxialkabel mit einem Schirmungsmaß > 95 dB

| Artikelnr. | Kabellängen (m) | Verpackung (Maße in mm) | Gewicht (kg) | Abbildung | EAN Code |
|------------|-----------------|---|---|---|-----------------|
| 70388 | 1.00 | Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235 | Einzelkarton: 1.12 Export VPE: 6.30 |  | 4 040849 703881 |
| 70390 | 2.00 | Einzelkarton: 185 x 80 x 35 Export VPE (30 Stk.): 400 x 270 x 235 | Einzelkarton: 0.17 Export VPE: 6.00 |  | 4 040849 703904 |
| 70391 | 3.00 | Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435 | Einzelkarton: 0.27 Export VPE: 8.10 |  | 4 040849 703911 |
| 70392 | 5.00 | Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435 | Einzelkarton: 0.35 Export VPE: 10.20 |  | 4 040849 703928 |
| 70393 | 7.50 | Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435 | Einzelkarton: 0.49 Export VPE: 11.20 |  | 4 040849 703935 |
| 70394 | 10.00 | Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435 | Einzelkarton: 0.59 Export VPE: 13.30 |  | 4 040849 703942 |
| 70396 | 15.00 | Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435 | Einzelkarton: 0.84 Export VPE: 14.90 |  | 4 040849 703966 |
| 70397 | 20.00 | Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435 | Einzelkarton: 1.05 Export VPE: 18.80 |  | 4 040849 703973 |

TARIC-Code: 85444290900

Bei Clicktronic® werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI™-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI™-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI™ handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig

SAT antenna cable

F-coaxial cable with a shielding rating of > 95 dB

Noise free television reception is primarily a question of the right material. This coaxial cable is specifically designed to satisfy demanding requirements in high-definition television formats. Thanks to two layers of signal shielding, pure materials, and precise processing, it transfers the HDTV and DVB signals without any loss to the receiver. Therefore, you can be sure that you get the experience exactly as it was meant to be.

- pure copper conductor and 2-way shielding for clear signal quality
- particularly suitable for digital satellite TV
- 24-Karat gold plated contacts for minimum transfer resistances

casual



Specifications

Connections

| | |
|-------------------------------------|-------------------------|
| Plug material: | triple-coated PVC / ABS |
| Contact material: | 24-Karat gold plated |
| Shielding: | yes |
| Port 1, type: | F-connector |
| Connector 1, connector length (mm): | 39.8 |
| Connector 1, connector width (mm): | 14.0 |
| Connector 1, connector height (mm): | 14.0 |
| Port 2, type: | F-connector |
| Connector 2, connector length (mm): | 39.8 |
| Connector 2, connector width (mm): | 14.0 |
| Connector 2, connector height (mm): | 14.0 |

cable

| | |
|--------------------------------|---|
| Type: | Round cable |
| Length (m): | 1 2 3 5 7.5 10 15 20 |
| Inner conductor material: | OFC (Oxygen free copper) |
| Inner conductor diameter (mm): | 1 x 0.65 |
| AWG: | 22 |
| Number of shieldings: | 2 x |
| Type of 1st shielding | Aluminium foil |
| Type of 2nd shielding | Copper braid 96 wires x 0.12 mm cross section |
| Outer sheath material: | highly elastic PVC |
| Outer sheath diameter (mm): | 6.0 |
| Ferrite core: | on both sides |
| Ferrite core diameter (mm): | 14.0 |
| Kink protection: | on both sides |

Signal transmission

| | |
|-------------------------------|-------|
| Transmission modes: | DVB-S |
| Shielding rating (dB): | > 95 |
| Characteristic impedance (Ω): | 75 |

General


| | |
|---------------------------------------|-----------|
| Operating temperature from / to (°C): | -10 / +80 |
| Warranty (years): | 10 |




F-connector




F-connector



Cross section

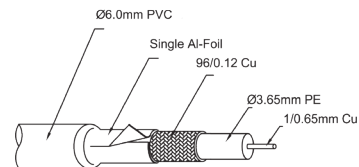

Wiring diagram











10 Years Warranty
OFC
24 Carat Gold
2x

Designed in Germany High-Quality Assurance 99,99% Oxygen Free Copper Anti Resistance Connections Cable Shielding

SAT antenna cable

F-coaxial cable with a shielding rating of > 95 dB

| Article no. | Cable lengths (m) | Packaging dimensions (mm) | Weight (kg) | Figure | EAN Code |
|-------------|-------------------|---|---|---|-----------------|
| 70388 | 1.00 | Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235 | Single carton: 1.12 Master carton: 6.30 |  | 4 040849 703881 |
| 70390 | 2.00 | Single carton: 185 x 80 x 35 Master carton (30 pcs.): 400 x 270 x 235 | Single carton: 0.17 Master carton: 6.00 |  | 4 040849 703904 |
| 70391 | 3.00 | Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435 | Single carton: 0.27 Master carton: 8.10 |  | 4 040849 703911 |
| 70392 | 5.00 | Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435 | Single carton: 0.35 Master carton: 10.20 |  | 4 040849 703928 |
| 70393 | 7.50 | Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435 | Single carton: 0.49 Master carton: 11.20 |  | 4 040849 703935 |
| 70394 | 10.00 | Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435 | Single carton: 0.59 Master carton: 13.30 |  | 4 040849 703942 |
| 70396 | 15.00 | Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435 | Single carton: 0.84 Master carton: 14.90 |  | 4 040849 703966 |
| 70397 | 20.00 | Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435 | Single carton: 1.05 Master carton: 18.80 |  | 4 040849 703973 |

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pöhlmannstraße 12, D-38112 Braunschweig/Germany