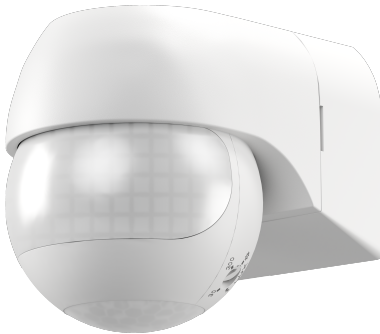
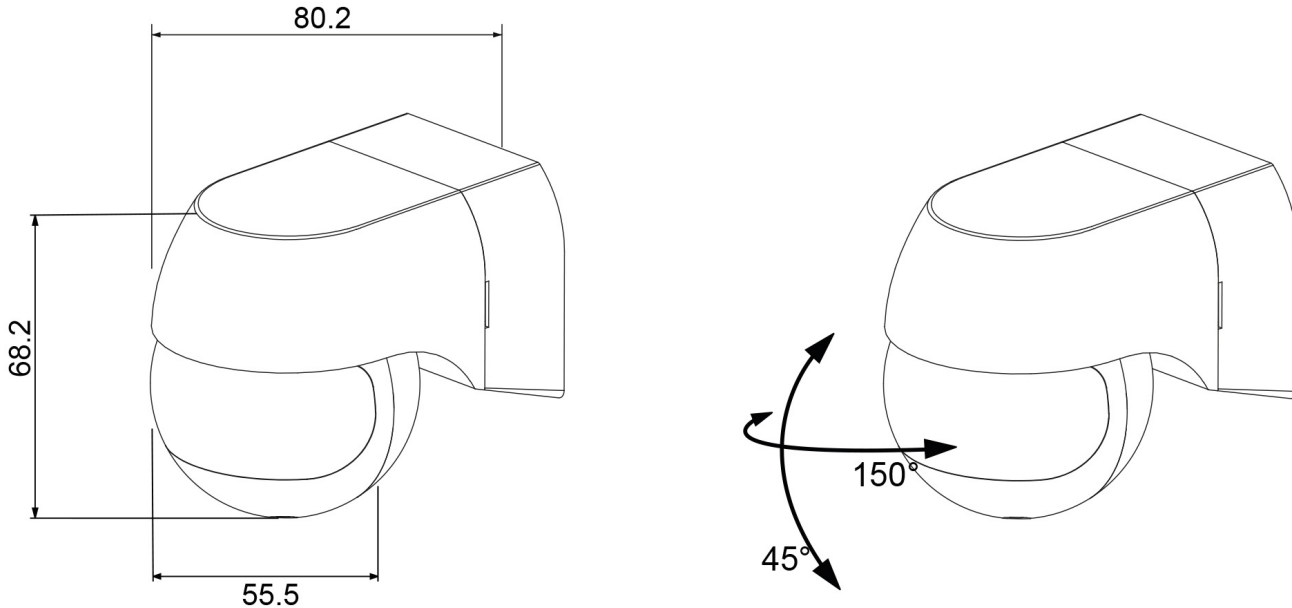


	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
A	79593				 										A	
B															B	
C															C	
D															D	
E	79597				Bewegungsmelder, neigbar/schwenkbar - Der Bewegungsmelder hat 2 Infrarot-Sensor für die horizontale (180°) und vertikale Detektion (360°). - Für die optimale Ausrichtung ist das Kopfgelenk dreh- und neigbar. - Spritzwasserschutz nach Schutzart IP44 und damit auch in Außenbereichen und Feuchträumen verwendbar - Der PIR-Sensor reagiert auf die Bewegung und Geräusche von Menschen oder Tieren und aktiviert bei Dunkelheit die angeschlossene Beleuchtung - Ersetzt den Lichtschalter und schaltet berührungslos Motion Detector, tiltable/swivelling - The motion detector has two infrared sensors for horizontal (180°) and vertical detection (360°). - The head joint can be rotated and tilted for optimal alignment. - Splash protection according to protection class IP44, making it suitable for use in outdoor areas and damp rooms - The PIR sensor reacts to the movement and noises of people or animals and activates the connected lighting when it is dark - Replaces the light switch and switches without contact										E	
F															F	
G															G	
H															H	
I	Änderungen				Datum	Name		Bezeichnung				Blatt		I		
J	Datum		Name		gez.:	18.12.2025		ir		Motion Sensor AP-3 outd. IP44 tilt/swivel/2lens whi				1/2		J
					gepr.:	18.12.2025		ir								
					Norm:					Zeichnungs-Nr.:				von		
					Änderungen vorbehalten / Subject to change					79593_79597						
	1	2	3	4	5	6	7	8	9	10	11	12	13	14		

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A															A
B	Technische Daten							Specifications							B
C	Eingangsspannung: 220–240 V, 50/60 Hz							Input voltage: 220-240 V, 50/60 Hz							C
D	Maximale Last: 1200 W (Glühlampe)							Maximum load: 1200 W (incandescent lamp)							D
E	600 W (LED/Energiesparlampe)							800 W (LED / Energy saving lamp)							E
F	Minimale Last: 1 W							Minimum load: 1 W							F
G	Leistungsaufnahme: ~ 0,5 W							Power consumption: ~ 0.5 W							G
H	Erfassungsbereich: max. 12 m							Detection area: max. 12 m							H
I	Erfassungswinkel: 180°							Detection angle: 180°							I
J	Montagehöhe: 1,8–2,5 m							Mounting height: 1.8 - 2.5 m							J
	Lichtempfindlichkeit (einstellbar): < 3–2000 Lx							Light sensitivity (adjustable): < 3 - 2000 Lx							
	Leuchtdauer: 10 Sek. ±3 Sek. – 15 Min. ±2 Min.							Burn time: 10 sec. ±3 sec. - 15 min. ±2 min.							
	Schutzklasse: II							Protection class: II							
	Schutzgrad: IP44 (spritzwassergeschützt)							Protection level: IP44 (splashwater-proof)							
	Betriebsfeuchtigkeit: < 93 % r. F.							Operating humidity: < 93% RH							
	Betriebstemperatur: -20 bis + 40 °C							Operating temperature: -20 ~ + 40 °C							
	Abmessungen: 68,2 x 55,5 x 80,2 mm							Dimensions: 68.2 x 55.5 x 80.2 mm							