

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

B

C

D

E

F

G

H

I

J

A

B

C

D

E



F

G

H


I

J

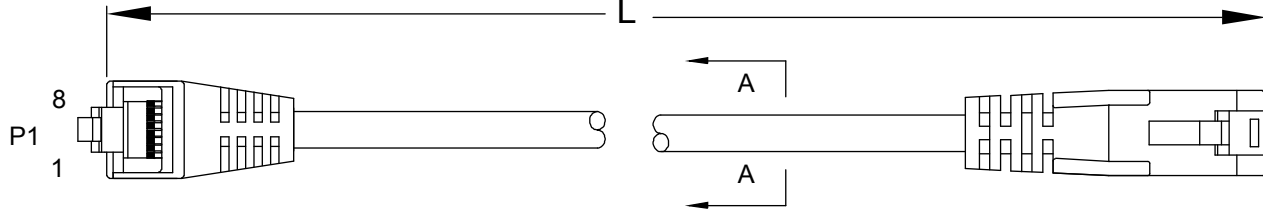



Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Farbe / color
94169	CAT 5-0025 U/UTP (1x90°) SCHWARZ 0.25m	250 ± 20 mm	schwarz / black
94170	CAT 5-0050 U/UTP (1x90°) SCHWARZ 0.50m	500 ± 20 mm	
94171	CAT 5-0100 U/UTP (1x90°) SCHWARZ 1m	1000 ± 20 mm	
94172	CAT 5-0200 U/UTP (1x90°) SCHWARZ 2m	2000 ± 40 mm	
94173	CAT 5-0300 U/UTP (1x90°) SCHWARZ 3m	3000 ± 50 mm	
94174	CAT 5-0500 U/UTP (1x90°) SCHWARZ 5m	5000 ± 70 mm	
94175	CAT 5-1000 U/UTP (1x90°) SCHWARZ10m	10000 ± 100 mm	
94193	CAT 5-1500 U/UTP (1x90°) SCHWARZ 15m	15000 ± 150 mm	weiß / white
94161	CAT 5-0025 U/UTP (1x90°) WEISS 0.25m	250 ± 20 mm	
94162	CAT 5-0050 U/UTP (1x90°) WEISS 0.50m	500 ± 20 mm	
94163	CAT 5-0100 U/UTP (1x90°) WEISS1m	1000 ± 20 mm	
94164	CAT 5-0200 U/UTP (1x90°) WEISS 2m	2000 ± 40 mm	
94165	CAT 5-0300 U/UTP (1x90°) WEISS 3m	3000 ± 50 mm	
94166	CAT 5-0500 U/UTP (1x90°) WEISS 5m	5000 ± 70 mm	
94167	CAT 5-1000 U/UTP (1x90°) WEISS 10m	10000 ± 100 mm	
94168	CAT 5-1500 U/UTP (1x90°) WEISS 15m	15000 ± 150 mm	

Anschlussdiagramm / Wiring diagram

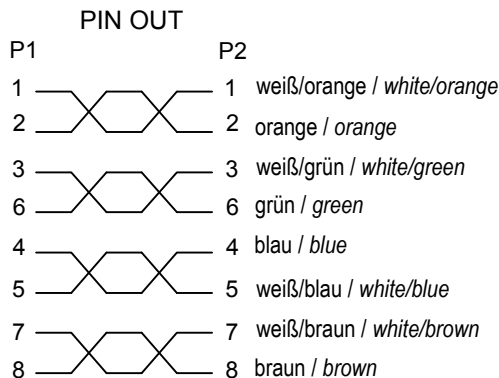

Aderquerschnitt / Wire cross section

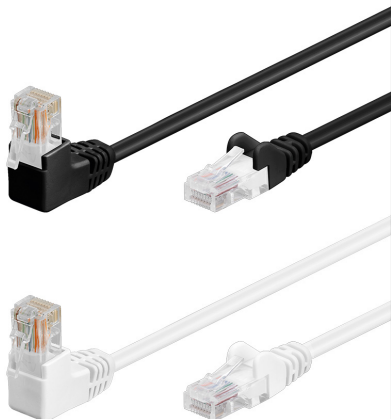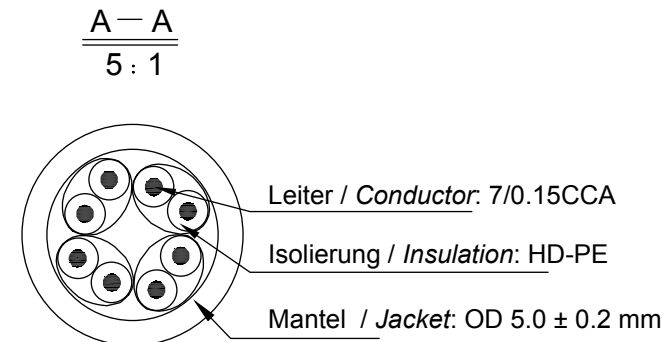

**CAT 5e Patchkabel 1x 90° gewinkelt, U/UTP**

- Slimline-Knickschutztülle
- Rastnasenschutz und Längenangabe am geraden Stecker
- Paarfolge nach EIA/TIA 568B
- Gigabit (10/100/1000 Mbit) Netzwerk geeignet

- Anschlüsse: RJ45-Stecker 90°(8P8C), RJ45-Stecker (8P8C)
- Kontakte: vergoldet
- Material Kabelmantel: PVC
- Schirmungsklasse: U/UTP
- Innenleiter: AWG 26/7 (stranded), 4 x 2 x 7/0.15 ± 0.005 CCA
- Spannungsfestigkeit: 300 V ---
- Kontaktwiderstand: max. 3 Ω
- Isolationswiderstand: 10 MΩ @ 10 ms
- Impedanz: 100 Ω
- Konformität: REACH, RoHS

**CAT 5e patchcable 1x 90°angled, U/UTP**

- slimline strain relief
- latch protection and length specification on straight plug
- pair-sequence acc. to EIA/TIA 568B
- Gigabit (10/100/1000 Mbit) network suitable

- Connectors: RJ45 plug 90° (8P8C), RJ45 plug (8P8C)
- Contacts: gold-plated
- Material cable jacket: PVC
- Shielding: U/UTP
- Inner conductor: AWG 26/7 (stranded), 4 x 2 x 7/0.15 ± 0.005 CCA
- Withstanding voltage: 300 V ---
- Contact resistance: max. 3Ω
- Insulation resistance: 10 MΩ @ 10 ms
- Impedance: 100 Ω
- Conformity: REACH, RoHS

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	10.02.2021	aw
		gepr.:	10.02.2021	aw
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung  
**CAT 5-XXXX U/UTP (1x90°)**  
**XXXX Xm**



Zeichnungs-Nr.: Blatt

1/1

von

1 2 3 4 5 6 7 8 9 10 11 12 13 14