
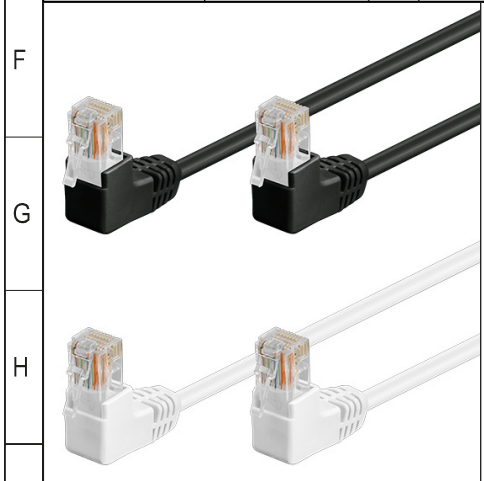
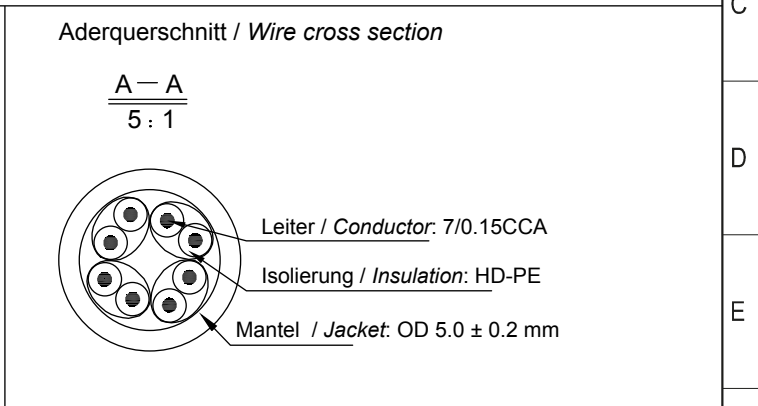


Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Farbe / color
96084	CAT 5-0025 U/UTP (2x90°) SCHWARZ 0.25m	250 ± 20 mm	schwarz / black
96085	CAT 5-0050 U/UTP (2x90°) SCHWARZ 0.50m	500 ± 20 mm	
96086	CAT 5-0100 U/UTP (2x90°) SCHWARZ 1m	1000 ± 20 mm	
96087	CAT 5-0200 U/UTP (2x90°) SCHWARZ 2m	2000 ± 40 mm	
96088	CAT 5-0300 U/UTP (2x90°) SCHWARZ 3m	3000 ± 50 mm	
96089	CAT 5-0500 U/UTP (2x90°) SCHWARZ 5m	5000 ± 70 mm	weiß / white
96090	CAT 5-1000 U/UTP (2x90°) SCHWARZ 10m	10000 ± 100 mm	
96068	CAT 5-0025 U/UTP (2x90°) WEISS 0.25m	250 ± 20 mm	
96069	CAT 5-0050 U/UTP (2x90°) WEISS 0.50m	500 ± 20 mm	
96070	CAT 5-0100 U/UTP (2x90°) WEISS 1m	1000 ± 20 mm	
96071	CAT 5-0200 U/UTP (2x90°) WEISS 2m	2000 ± 40 mm	
96072	CAT 5-0300 U/UTP (2x90°) WEISS 3m	3000 ± 50 mm	
96073	CAT 5-0500 U/UTP (2x90°) WEISS 5m	5000 ± 70 mm	
96074	CAT 5-1000 U/UTP (2x90°) WEISS 10m	10000 ± 100 mm	

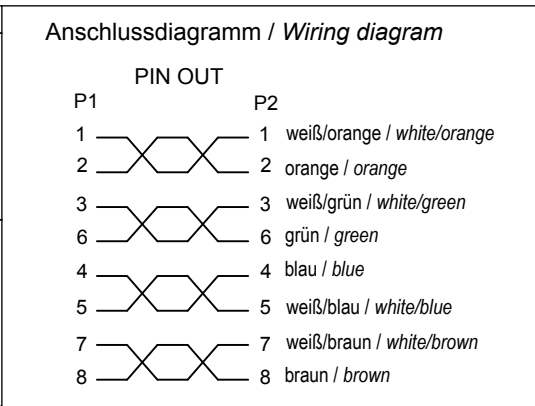

CAT 5e Patchkabel 2x 90° gewinkelt, U/UTP

- Slimline-Knickschutzhülse
- ohne Rastnasenschutz
- Paarfolge nach EIA/TIA 568B
- Gigabit (10/100/1000 Mbit) Netzwerk geeignet

- Anschlüsse: 2x RJ45-Stecker 90° (8P8C)
 - Kontakte: vergoldet
 - Material Kabelmantel: PVC
 - Schirmungsklasse: U/UTP
 - Innenleiter: AWG 26/7, 4 x 2 x 7/0.15 ± 0.005 CCA
 - Spannungsfestigkeit: 300 V ---
 - Kontaktwiderstand: max. 3 Ω
 - Isolationswiderstand: 10 MΩ @ 10 ms
 - Impedanz: 100 Ω
 - Konformität: REACH, RoHS

CAT 5e patchcable 2x 90° angled, U/UTP

- slimline strain relief
- without latch protection
- pair-sequence acc. to EIA/TIA 568B
- Gigabit (10/100/1000 Mbit) network suitable

- Connectors: 2x RJ45 plug 90° (8P8C)
 - Contacts: gold-plated
 - Material cable jacket: PVC
 - Shielding: U/UTP
 - Inner conductor: AWG 26/7, 4 x 2 x 7/0.15 ± 0.005 CCA
 - Withstanding voltage: 300 V ---
 - Contact resistance: max. 3Ω
 - Insulation resistance: 10 MΩ @ 10 ms
 - Impedance: 100 Ω
 - Conformity: REACH, RoHS

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 09.02.2021	aw	CAT 5-XXXX U/UTP (2x90°) XXXX Xm	1/1
		gepr.: 09.02.2021	aw		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	von

