
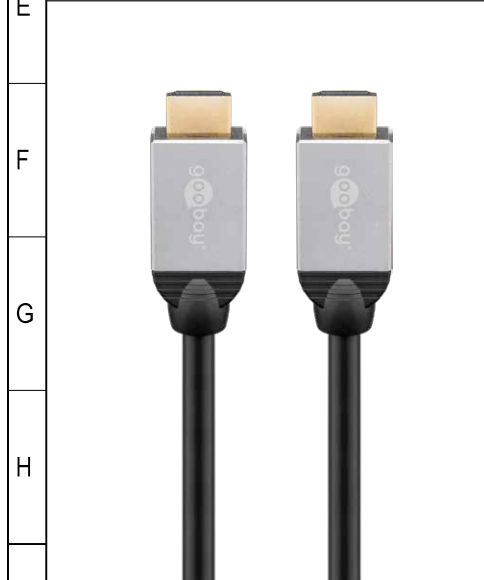


1 2 3 4 5 6 7 8 9 10 11 12 13 14

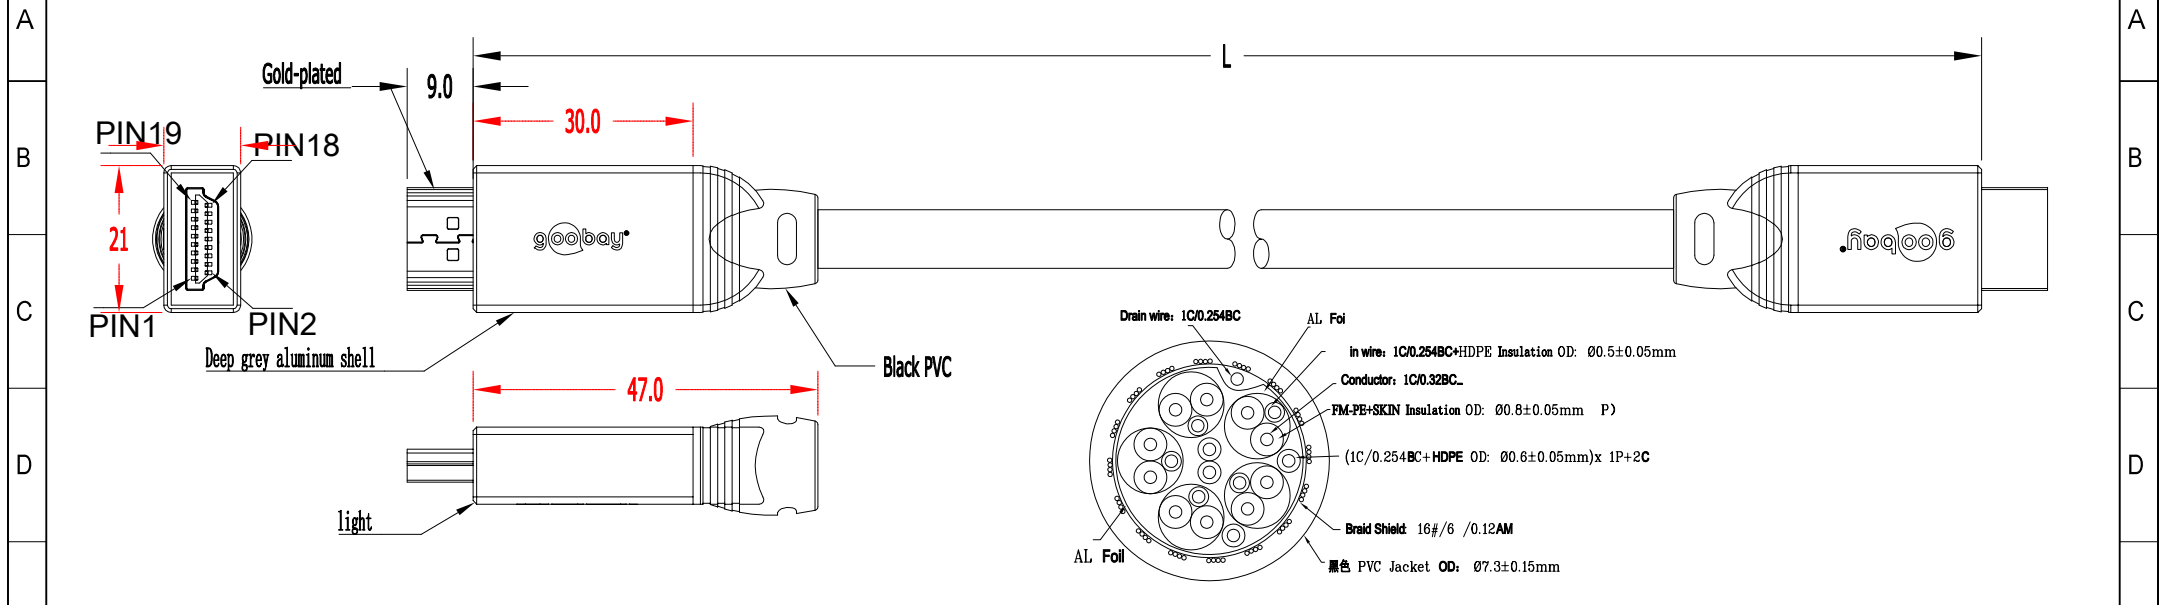

PIN Assignment

1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	2	3	4	5	6	7	8	9	10	11	12	13	14
TMDS Data 2+	TMDS Data 2 shield	TMDS Data 2-	TMDS Data 1+	TMDS Data 1 shield	TMDS Data 1-	TMDS Data 0+	TMDS Data 0 shield	TMDS Data 0-	TMDS Clock+	TMDS Clock shield	TMDS Clock-	CEC	Utility/HEAC+
													DDC/CEC/HEAC GND
													HPD/HEAC-
													SCL
													SDA
													5V Power
													Shell

Nr. / No.	Länge / Length (m)
75053	1.0
75603	1.5
75777	2.0
75844	3.0
75919	5.0

HighSpeed HDMI™ Anschlusskabel mit Ethernet

- HighSpeed HDMI™ für 3D und Ultra HD bis 4K@50/60 Hz (2160p)
- vergoldete Kontaktflächen für optimale Signalübertragung
- hochwertige Metallstecker
- optimierter Knickschutz und flexible Kabelummantelung
- Anschlüsse: 2x HDMI-Stecker (Typ A)
- Konformität: RoHS, REACH

HighSpeed HDMI™ connection cable with Ethernet

- HighSpeed HDMI™ for 3D and Ultra HD up to 4K @ 50/60 Hz (2160 p)
- gold-plated contact surfaces for optimum signal transmission
- high-quality metal connectors
- optimised bend protection and flexible cable sleeving
- Connections: 2x HDMI male (Type A)
- Conformity: RoHS, REACH

Änderungen				Datum	Name	Bezeichnung	Blatt
Datum		Name		gez.: 09.07.2019	tf	HDMI cable 2.0 (4K/60 Hz)	von
				gepr.: 09.07.2019	tf		
				Norm:	Zeichnungs-Nr.:		
Änderungen vorbehalten / Subject to change							

1 2 3 4 5 6 7 8 9 10 11 12 13 14